
Rev	AWO #	Description	Date	Appr
-		RELEASED	7/3/17	

APPROVED: _____

DATE: _____ TITLE: _____

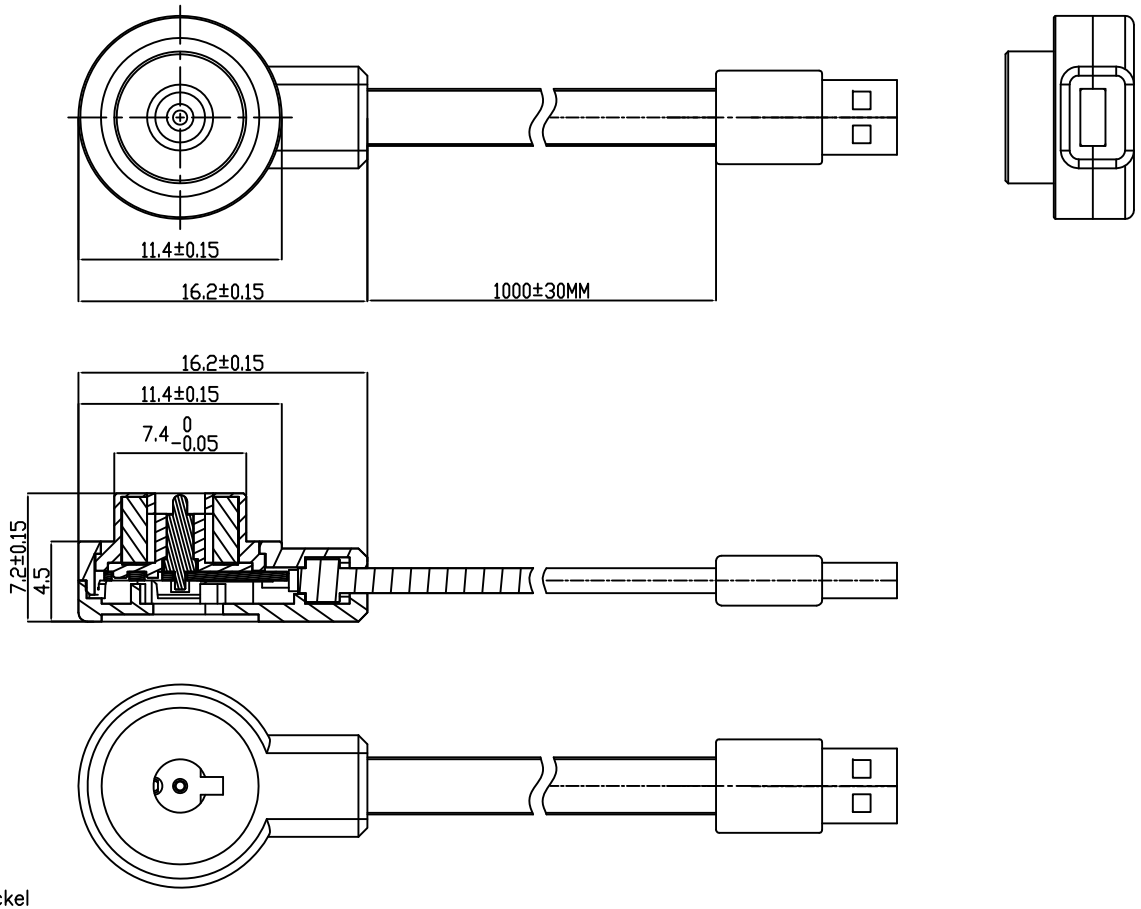

SPECIFICATIONS:

Material:

Housing: ABS

Contact: Brass, 3u" Gold plated over Nickel

Spring: SUS

Electrical:

Voltage rating (Per Contact): 15 Volts

Current rating (Per Contact): 2 A max

Contact resistance: 30 mohms max @ working stroke

nsulation resistance: 100 Mohms min

Dielectric withstanding voltage: 100 VRMS

Cable:

3.2x1.6mm Flat Cable, Color: White

Mechanical:

Working Stroke & Force: 0.7mm (per Contact) @ 70gf max

Durability: 30,000 cycles min

Temperature Rating:

Operating temperature: −30°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

Millimeters		HOLES	
.X	± .25		
.XX	± .15	Ø.XX	±.15
.XXX	± .05		

APPROVALS		DATE
DRAWN	HR	7/3/17
CHECKED	CK	7/3/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE

POGO PIN CHARGING CABLE, MALE

SIZE	PART NO.	REV.
X	CA-RA2-PHR-32572-M	-

REF:	SCALE:	SHEET
S00185C	NTS	1 OF 1