




APPROVED: _____
 DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	1/22/19	
A		UPDATE SPEC.	11/5/20	OW/BL

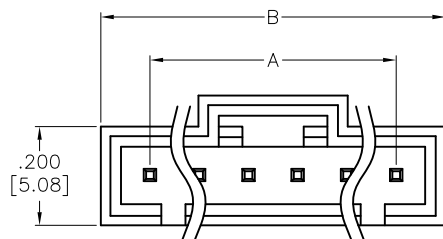

3P



2P

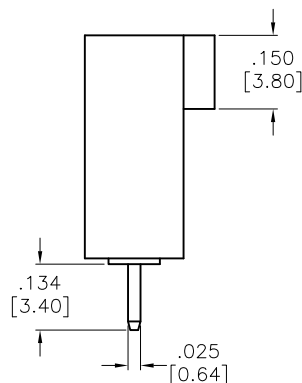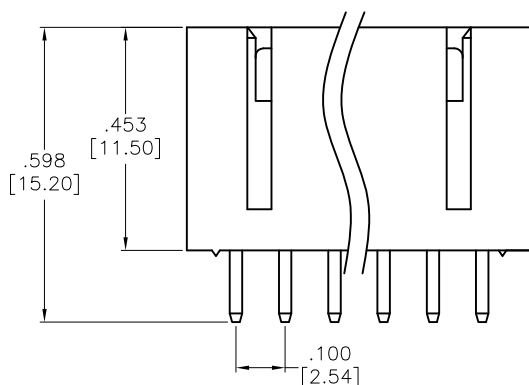

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: LCP, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 250 VAC/DC

Current rating: 2.5A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 15

A = .100 [2.54] x No. of Spaces

B = .100 [2.54] x No. of Positions + .100 [2.54]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	1/22/19
CHECKED	LW	1/22/19
APPROVED		

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		.100 [2.54] LATCHING HEADER STRAIGHT, PCB, GOLD PLATED	
SIZE	PART NO.	REV.	
X	CDR-E-XX-GS-HT	A	
REF:	S00015T	SCALE:	NTS
SHEET 1 OF 1			