
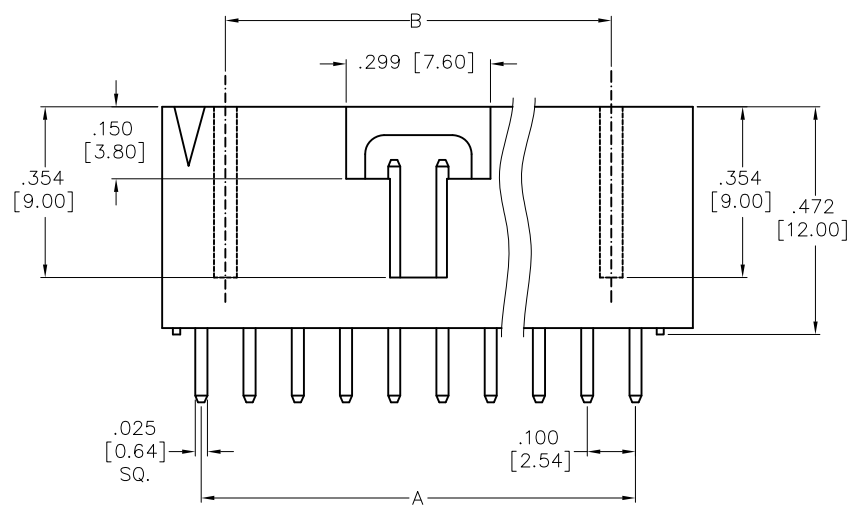
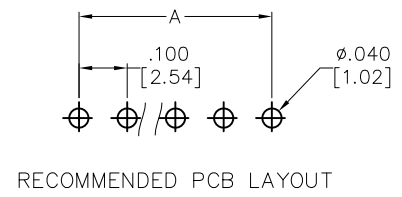


SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold over Nickel underplate on contact area,
Tin over Nickel underplate on PCB tails
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC For 1 Minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant

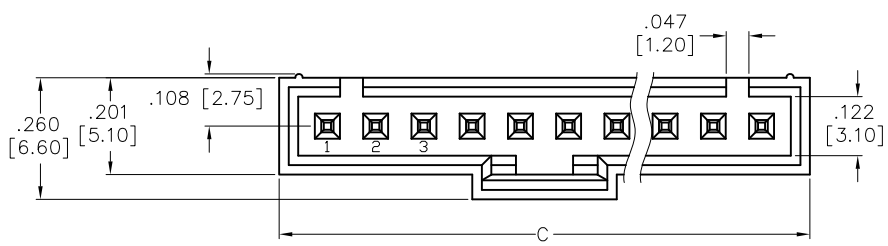

Positions: 02 thru 20
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Positions - .297 [7.55]
C = .100 [2.54] x No. of Positions + .100 [2.54]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES .X ± .10 .XX ± .020 .XXX ± .015		HOLES ØX ± .10 ØXX ± .015 ØXXX ± .010		TITLE .100 [2.54] WAFER, STRAIGHT, PCB, SEL-GOLD PLATED
DRAWN	LH	4/1/22	SIZE X	
CHECKED	YC	4/1/22	PART NO. CDR-F-XX-SGS	
APPROVED			REV. -	REF: S00111C
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SCALE: NTS SHEET 1 OF 1	