
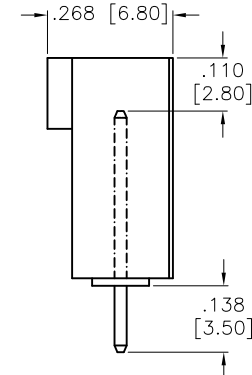
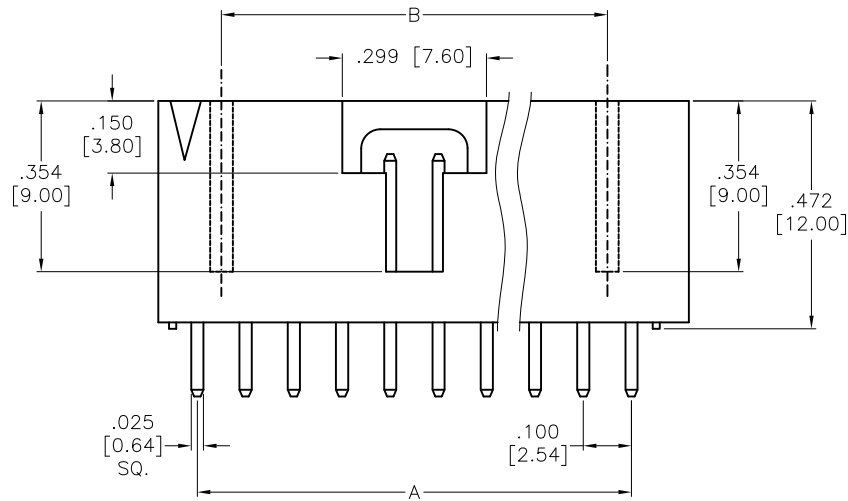
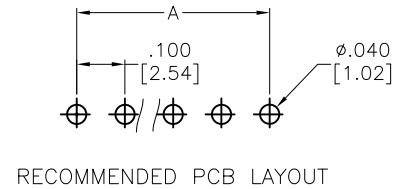


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/30/19	

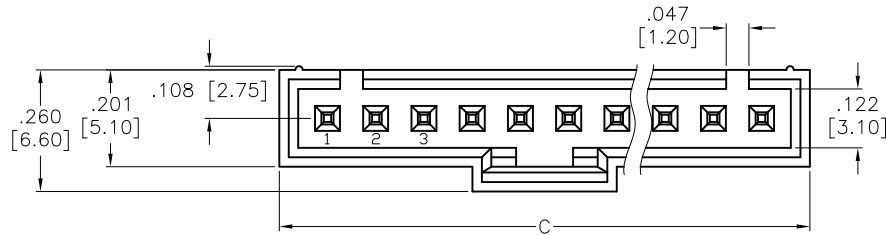

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Packaging: Poly Bag

Positions: 02 thru 20

A= .100 [2.54] x No. of Spaces

B= .100 [2.54] x No. of Positions - .297 [7.55]

C= .100 [2.54] x No. of Positions + .100 [2.54]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			DATE			TITLE
DRAWN	HR					.100 [2.54] WAFER, STRAIGHT
CHECKED	SL					PCB, TIN PLATED
APPROVED						
SIZE X			PART NO. CDR-F-XX-TS			REV. -
REF: S00111C			SCALE: NTS		SHEET 1 OF 1	