
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/09/10	
A		REVISED SPEC.	11/20/12	
B		UPDATE DRAWING	3/25/21	LH/LW

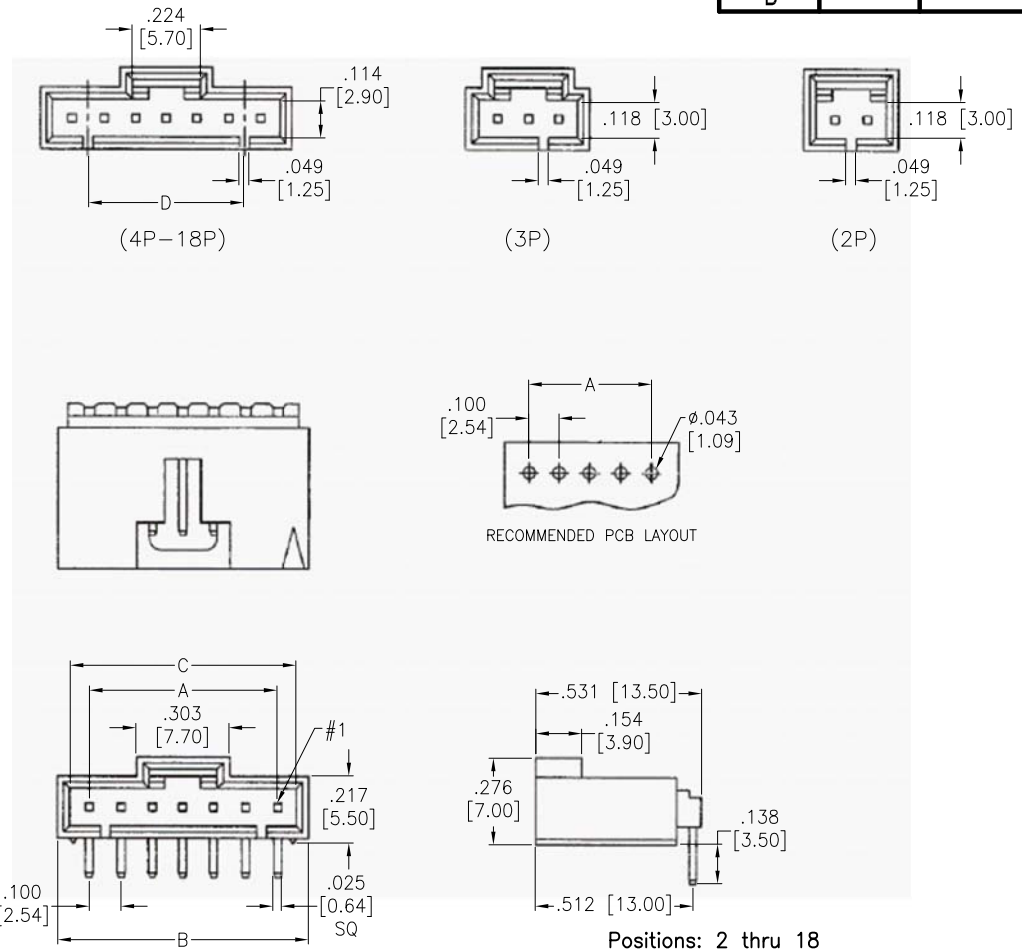

Positions: 2 thru 18
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Positions + .100 [2.54]
C = .100 [2.54] x No. of Positions + .025 [0.64]
D = (4P–18P) .100 [2.54] x No. of Positions – .200 [5.08]

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 V AC/DC
Current rating: 2.5 A AC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 600 VAC for 1 minute
Temperature Rating:
–25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	2/09/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] LATCHING HEADER RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	CDR-XX-GR-HT	B

REF: | SCALE: NTS | SHEET 1 OF 1