


Rev	AWO #	Description	Date	Appr
-		RELEASED	04/26/16	


APPROVED: _____


DATE: _____ TITLE: _____

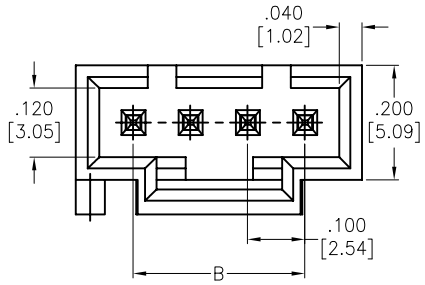



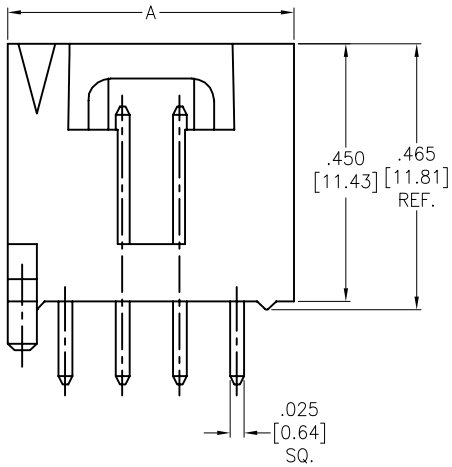

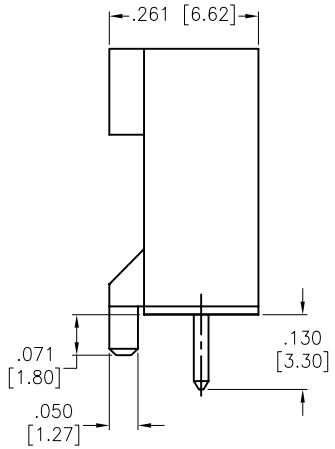

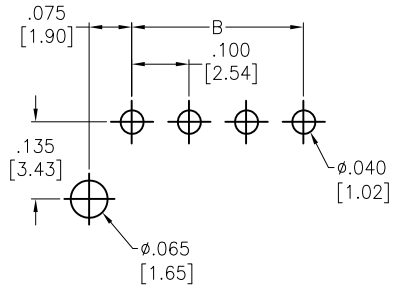

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi-temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Matte Tin over Nickel underplate overall.
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 03 thru 12
A= .100 [2.54] x No. of Position + .100 [2.55]
B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	04/26/16
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LATCHING HEADER, STRAIGHT PCB MOUNT, MATTE TIN, HI-TEMP

SIZE	PART NO.	REV.
X	CDR-XX-MTS-P1-HT	-

REF: S00186T | SCALE: NTS | SHEET 1 OF 1