


Rev	AWO #	Description	Date	Appr
-	7635	RELEASED	3/15/07	


APPROVED: _____

DATE: _____ TITLE: _____

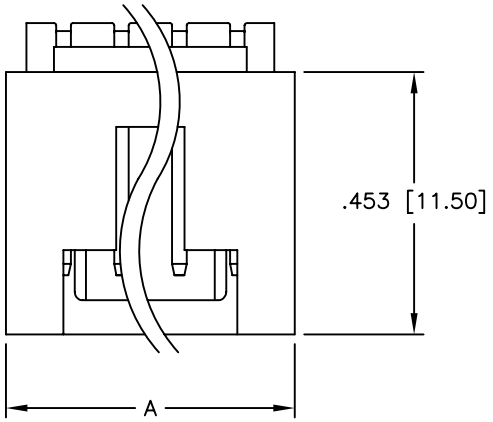

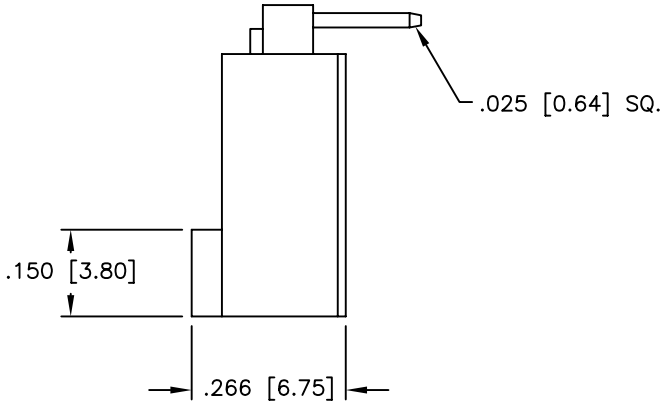

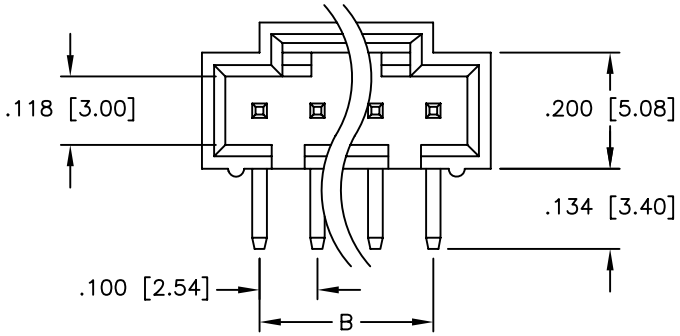

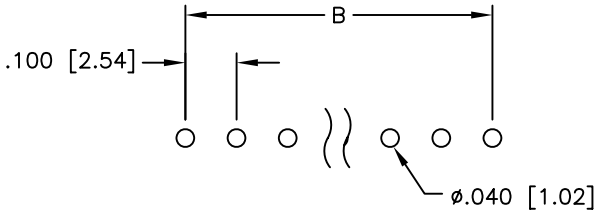

PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 6T, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 260°C for 5 seconds

RoHS COMPLIANT

Positions: 2 thru 12
A = .100 [2.54] x No. of Positions + .100 [2.54]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	3/15/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LATCHING HEADER RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	CDR-XX-TR-HT	-

REF: | SCALE: NTS | SHEET 1 OF 1