

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/13	
A		REVISED DIM.	2/21/14	AY

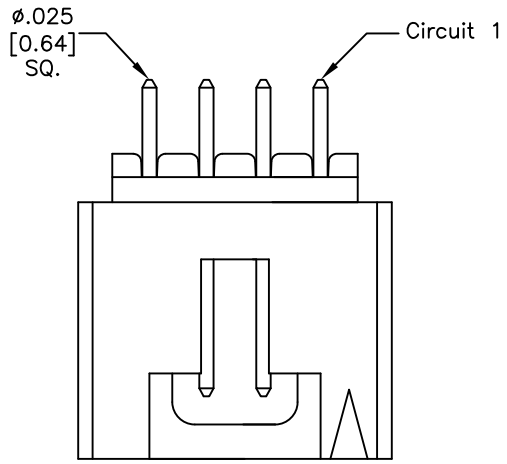





3P




2P

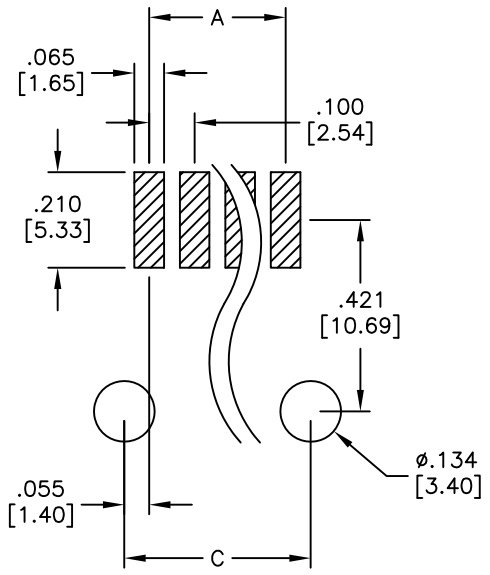

RECOMMENDED PCB LAYOUT

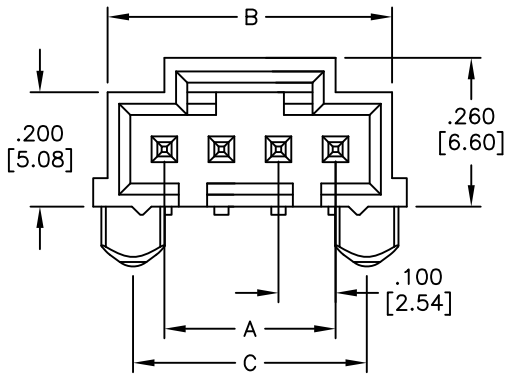

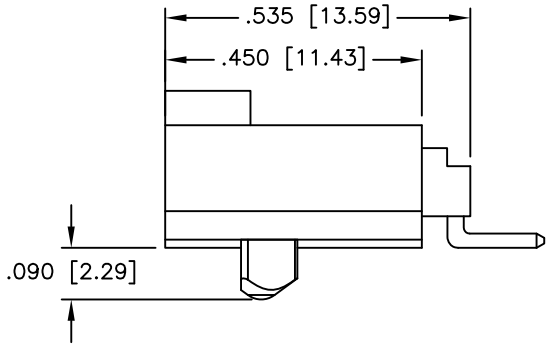

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper alloy
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 15 mohms max
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 16
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of (Positions+1) ±.016 [0.40]
C = .100 [2.54] x No. of Positions + .010 [0.25]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/13/13
CHECKED	EH	8/13/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] WAFER, RIGHT ANGLE, SMT TYPE

SIZE	PART NO.	REV.
X	CDR-XX-TR-SMT	A

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1