
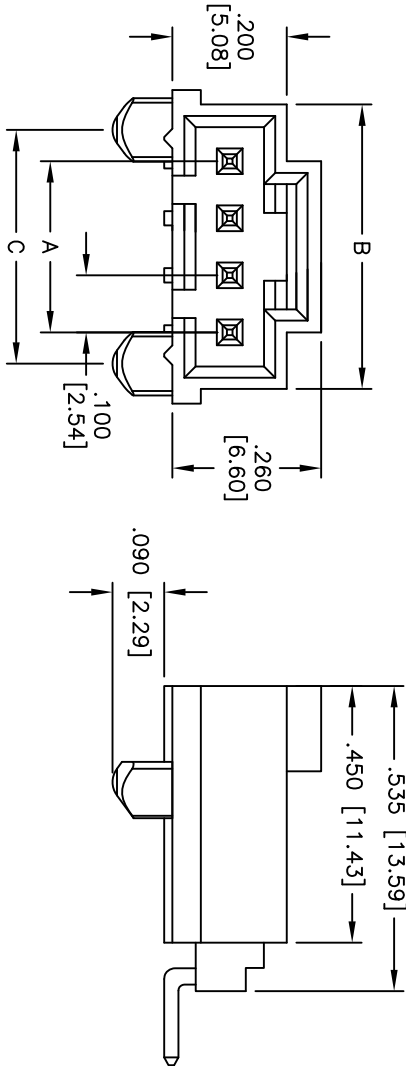
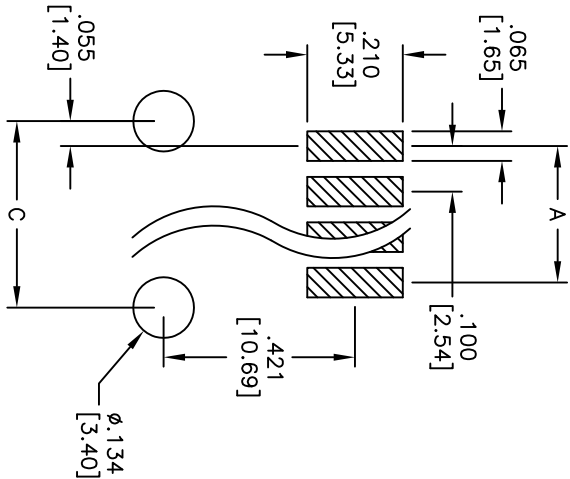
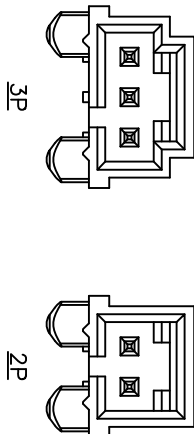


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/28/13	
A		REVISED DIM.	2/21/14	AY

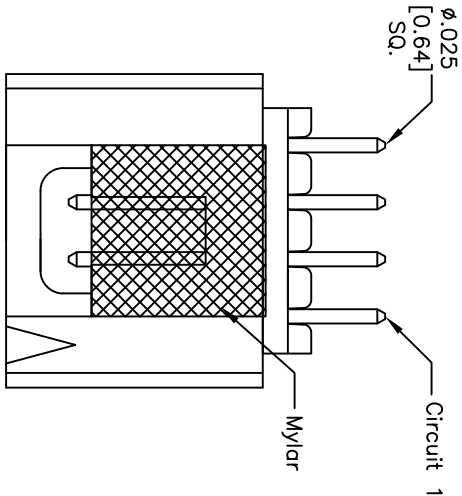

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper alloy
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 15 mohms max
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL

Positions: 2 thru 16
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of (Positions+1) $\pm .016$ [0.40]
C = .100 [2.54] x No. of Positions + .010 [0.25]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	$\pm .10$	ϕ X	$\pm .10$	.XX	$\pm .020$	ϕ XX	$\pm .015$
.XXX	$\pm .015$	ϕ XXX	$\pm .010$	.XXX	$\pm .015$	ϕ XXX	$\pm .010$
APPROVALS				DATE			
DRAWN	AY		10/28/13				
CHECKED	YC		10/28/13				
APPROVED							
TITLE				SIZE			
.100 [2.54] WAFER, RIGHT ANGLE, SMT TYPE				PART NO.			
				CDR-XX-TR-SMT-KT-T/R			
				REV.			
				A			

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710