

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/14/17	
A		CORRECTED OPERATING TEMP	6/15/17	
B		UPDATED DRAWING	7/26/17	HR/IC

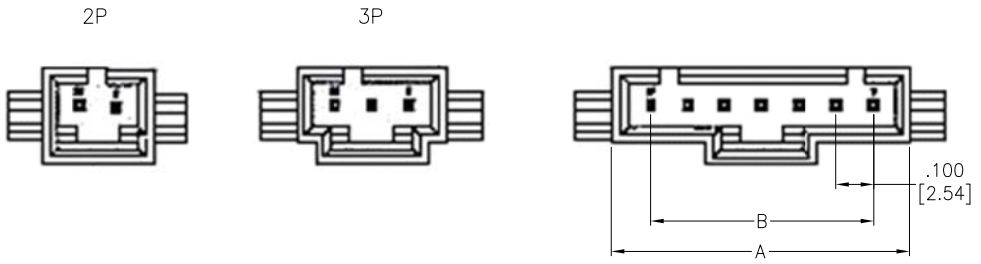

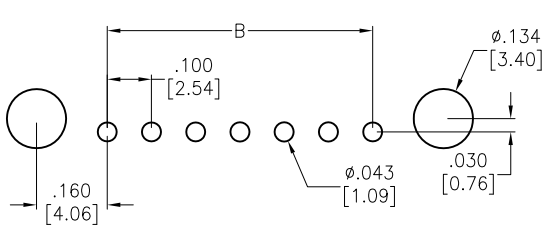

RECOMMENDED PCB LAYOUT

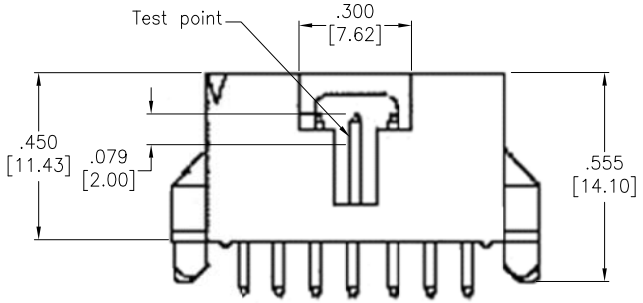

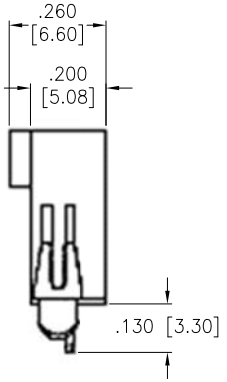

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Nickel under plate overall
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3 A AC/DC
Contact resistance: 15 mohms max
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 16
A = .100 [2.54] x No. of Positions + .100 [2.54]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/14/17
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LATCHING HEADER
TIN PLATED, STRAIGHT, PCB TYPE

SIZE	PART NO.	REV.
X	CDR-XX-TS-HT-P	B

REF: S00123T | SCALE: NTS | SHEET 1 OF 1