


APPROVED: _____
 DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/26/19	

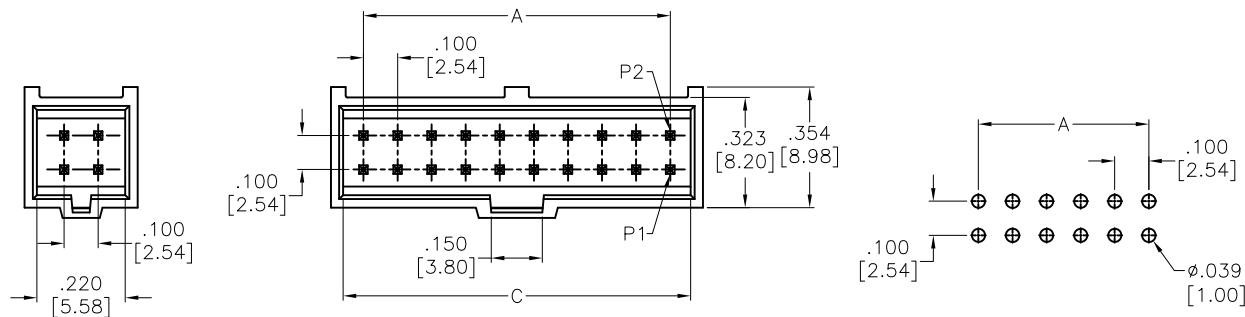

2X2P

2X3P~2X32P

RECOMMENDED PCB LAYOUT

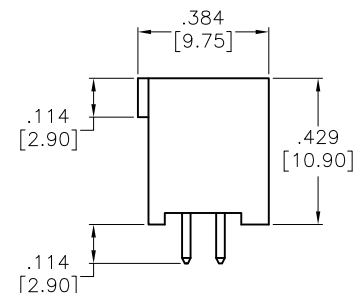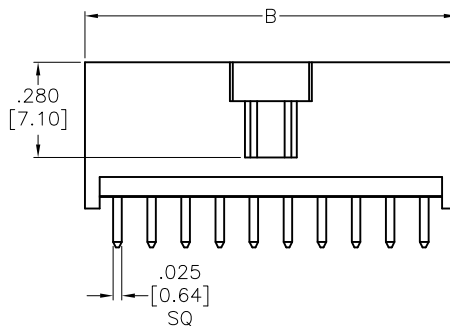

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 250 VAC/DC

Current rating: 3A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 64

A= .100 [2.54] x No. of Spaces

B= .100 [2.54] x No. of Positions per Row + .092 [2.34]

C= .100 [2.54] x No. of Positions per Row + .020 [0.50]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	3/26/19
CHECKED	RC1	3/26/19
APPROVED		

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE			
.100 [2.54] DUAL ROW STRAIGHT SHROUDED HEADER			
SIZE	PART NO.	REV.	
X	CDR2-XX-TS-C	-	
REF:	S00111C	SCALE:	NTS
SHEET 1 OF 1			