

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/12/06	


APPROVED: _____


DATE: _____ TITLE: _____

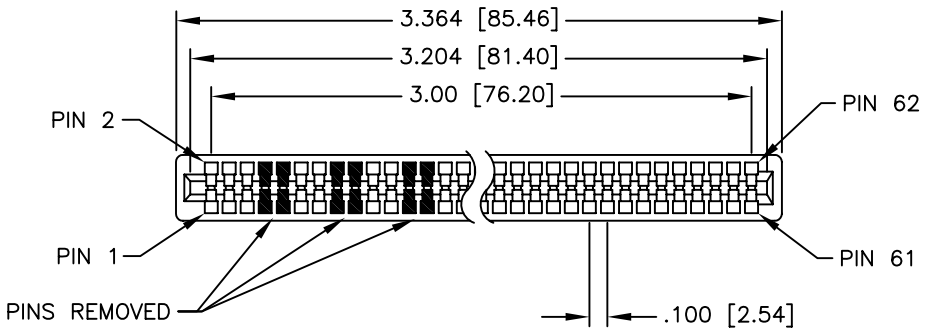

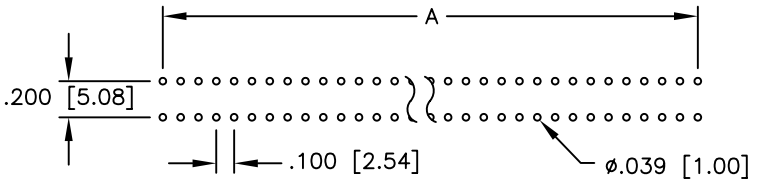

PCB LAYOUT

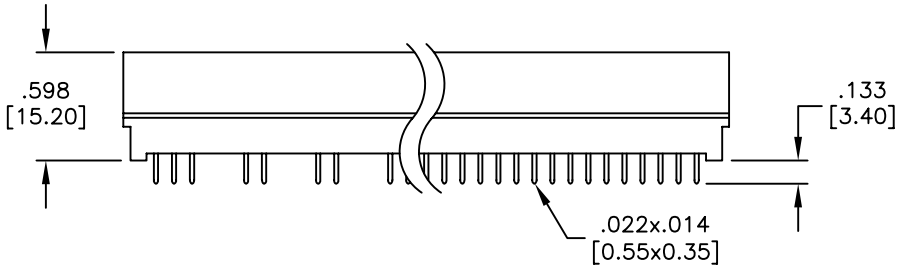

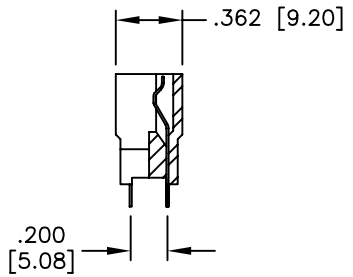

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Operating voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 3,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS complaint
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

Remove pins (NOT LOADED):
7, 8, 9, 10, 15, 16, 17, 18, 23, 24, 25 & 26

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SLS	9/12/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CARD EDGE CONNECTOR, 62P, VERTICAL
REMOVE: 7,8,9,10,15,16,17,18,23,24,25 & 26

SIZE	PART NO.	REV.
X	CE-62-U-SP1	-

REF: | SCALE: NTS | SHEET 1 OF 1