

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/22	

APPROVED: _____

DATE: _____ TITLE: _____

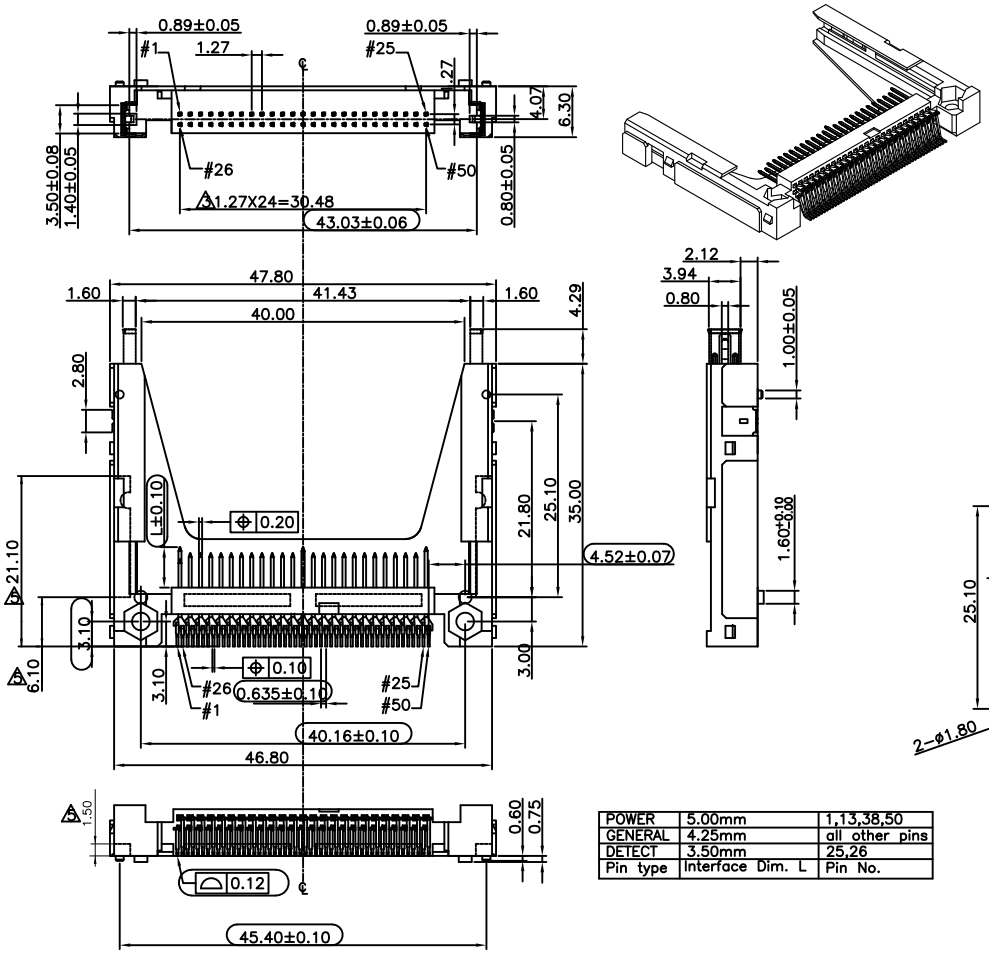

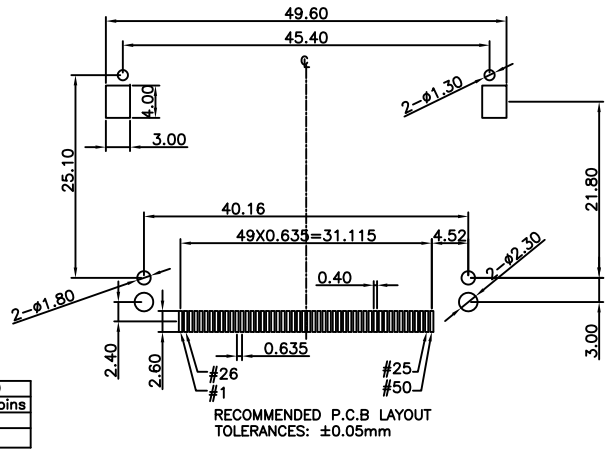

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

SPECIFICATIONS:

Material:

Insulator: Thermal Plastic, rated UL 94V-0

Contacts: Copper Alloy

Shell: Copper Alloy

Plating:

15u" Gold over Nickel underplate on contact area,
Tin over Nickel underplate on tails.

Electrical:

Operating Voltage: 100 VACmax

Current rating: 0.5 Amp max

Contact resistance: 40 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +90°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X ± .50	±5°
.X ± .30	
.XX ± .20	

DRAWN	WX	9/1/22
CHECKED	KL	9/1/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: CF TYPE I / II SOCKET
REVERSE MOUNT, W/ GROUNGING

SIZE	PART NO.	REV.
X	CF2A-50-SG-R-15	-

REF: S00013T | SCALE: NTS | SHEET 1 OF 1