

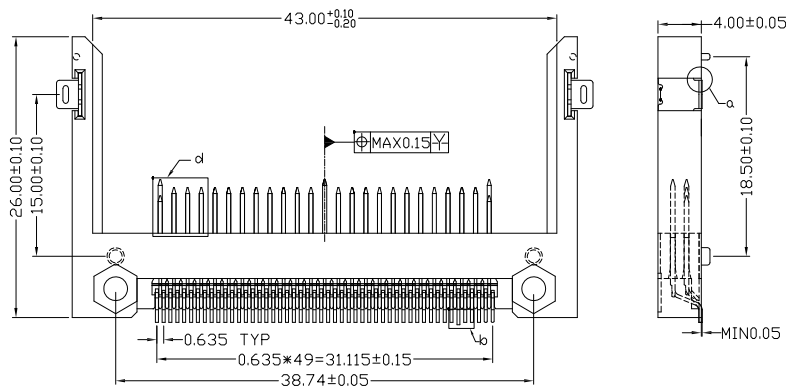
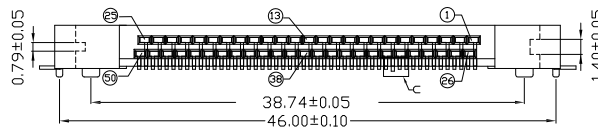




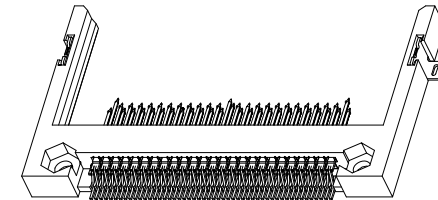


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/8/06	
A		UPDATED DRAWING	3/3/15	HR/NP
B		ADDED DIM.	6/4/15	HR/NP

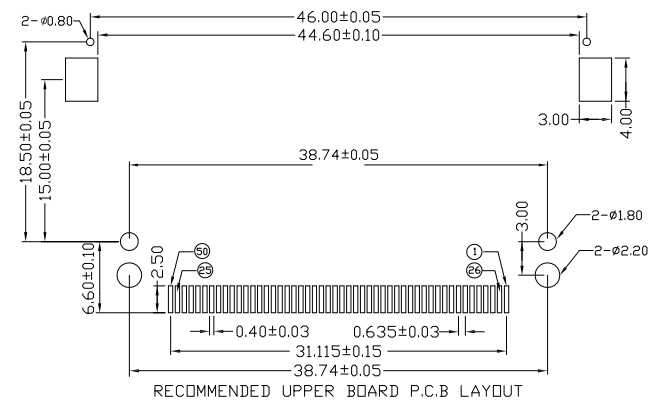

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Ivory
Contacts: Brass
Holddown: Brass, Tin plated
Plating:
Gold over Nickel underplate on contact area
Electrical:
Voltage rating: 100 VAC
Current rating: 0.5 Amp
Contact resistance: 40 mΩ
Insulation resistance: 1000 MΩ
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
Millimeters HOLES
.X ± .25
.XX ± .15
.XXX ± .05

APPROVALS		DATE
DRAWN	SS	2/8/06
CHECKED		
APPROVED		

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE			
CF SOCKET, SLIM TYPE, TOP MOUNT			
SIZE	PART NO.	REV.	
X	CFA-50-A-SG-2	B	
REF:	S00009T	SCALE:	NTS
SHEET 1 OF 1			