



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/1/22	
A		UPDATE SPEC.	11/30/22	WX/RC


Ⓐ Lock Nut

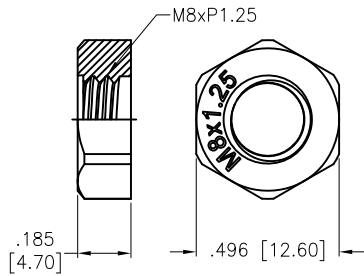


Ⓑ Washer

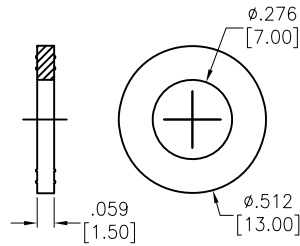




Ⓔ Sealing Nut

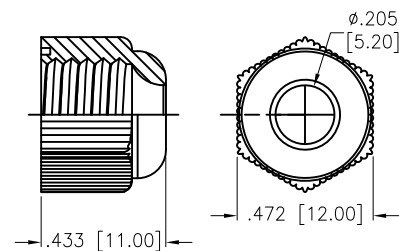

Ⓒ Body

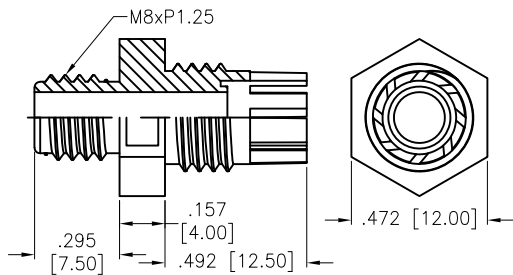

Ⓓ Seal

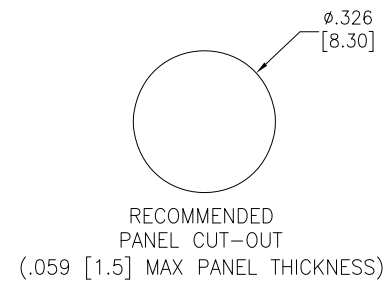

**SPECIFICATIONS:**

Material:  
 Lock Nut: PA66, rated UL 94V-2  
 Body: PA66, rated UL 94V-2  
 Sealing Nut: PA66, rated UL 94V-2  
 Washer: Nitrile Butylene  
 Seal: Nitrile Butylene  
 Mechanical:  
 Cable Range O.D.: 2.5-4.5mm  
 Thread O.D. L2: 8mm  
 Thread Length L2: 7.5mm  
 Spanner Size A&E: 13/12mm  
 Nut Torque: 0.2Nm Max.  
 Environmental:  
 Waterproof: IP68  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010



909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

DRAWN	WX	11/1/22
CHECKED	RC	11/1/22
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH		

TITLE			WATERPROOF CONNECTOR, M8, 1 HOLE, CABLE GLAND, WATERPROOF: IP68		
SIZE	PART NO.	REV.			
X	CG-P-M8-1.25	A			
REF:	S00211C	SCALE:	NTS	SHEET	1 OF 1