


Rev	AWO #	Description	Date	Appr
-	6884	RELEASED	7/20/08	


APPROVED: _____

DATE: _____ TITLE: _____

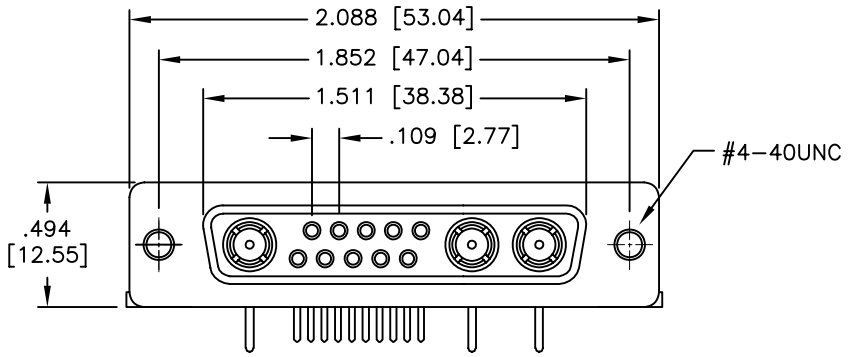



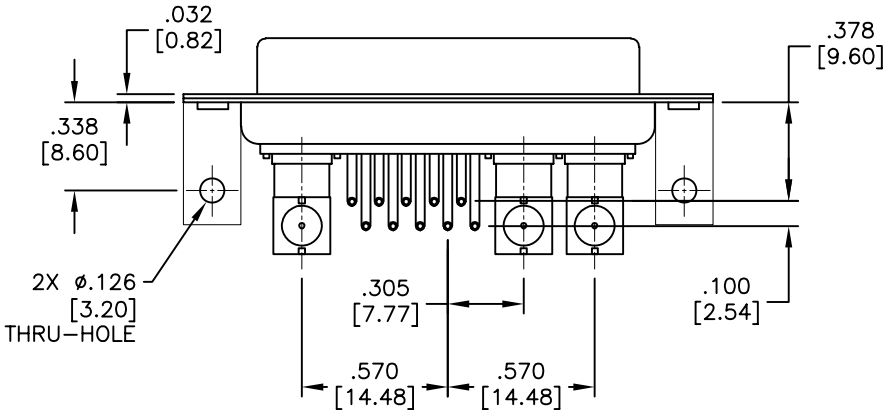

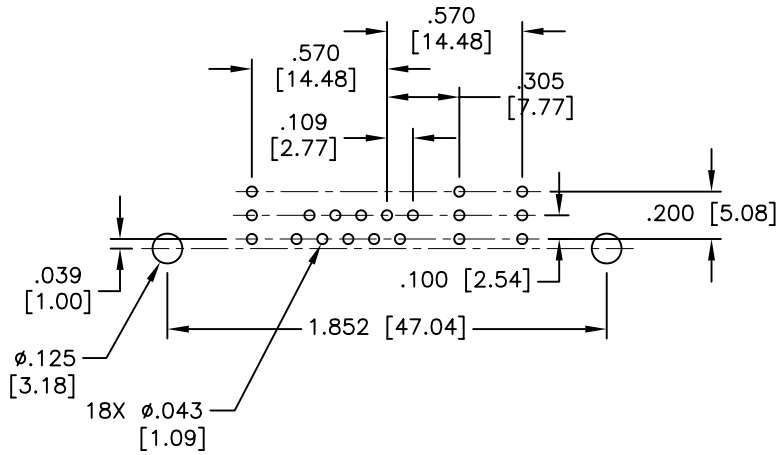

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS:

Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Coax Insulator: Teflon, color White
Contacts: Phosphor Bronze
Coax Contacts: Brass, Gold plated
Plating:
Gold flash over Nickel underplate overall

Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amp max
Coax Impedance: 75 Ohms
Contact resistance: 10 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute

Environmental:
Temperature Rating:
Operating temperature: -55°C to +280°C
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	7/20/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB CONNECTOR, COAX CONTACT, 75 ohm, R/A DIP TYPE

SIZE	PART NO.	REV.
X	D13W3-SL-2-2	-

REF: | SCALE: NTS | SHEET 1 OF 1