


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/30/08	


APPROVED: _____

DATE: _____ TITLE: _____

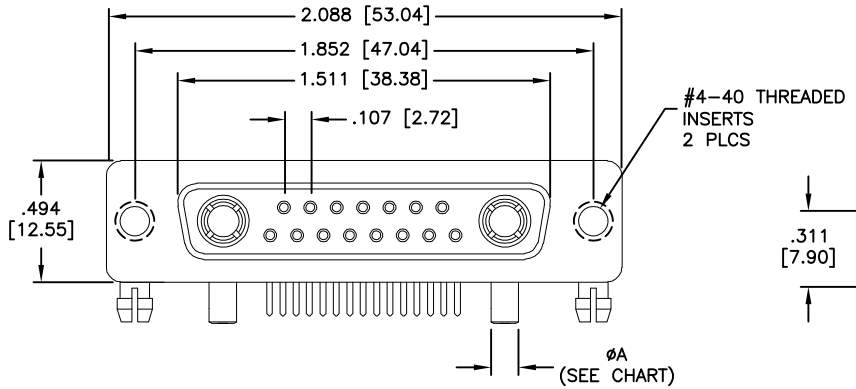



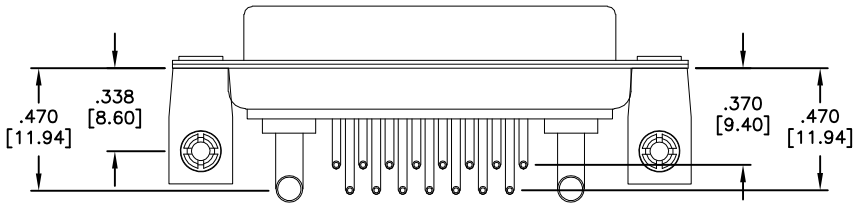

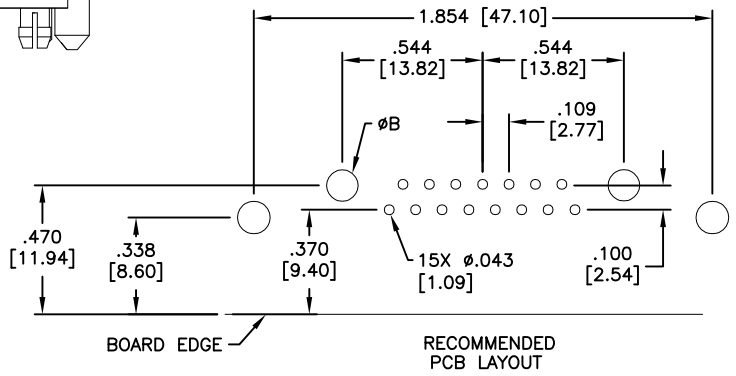

SPECIFICATIONS:
Material:
Insulator: PBT, 30% glass reinforced, rated UL 94V-0
Insulator color: Black
Coax Insulator: Teflon, color white
Contacts: Brass
Shell: Steel, Tin plated
Hardware: Brass, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Power Current rating: 10, 20 & 40 Amps max (See Chart)
Power Contact Resistance: 2.7 mohms max.
Signal Current rating: 5 Amps max.
Signal Contact resistance: 10 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

ADAM TECH PART NO.	CURRENT RATING	WIRE SIZE	DIMENSION	
			ØA	ØB
D17W2-SLP-6-2	40 AMPS	8-10 AWG	ø.147 [3.75]	ø.165 [4.20]
D17W2-SLP-4-2	20 AMPS	12-14 AWG	ø.110 [2.80]	ø.129 [3.28]
D17W2-SLP-3-2	10 AMPS	16-18 AWG	ø.067 [1.70]	ø.086 [2.20]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	7/30/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB COAX PLUG, D17W2, RIGHT ANGLE, FEMALE, PCB THRU-HOLE, SHORT BRACKET

SIZE	PART NO.	REV.
X	D17W2-SLP-X-2	-

REF: | SCALE: NTS | SHEET 1 OF 1