

6

5

4

3



2

1



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/16/20	

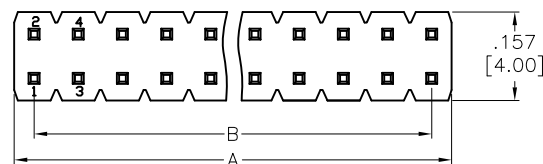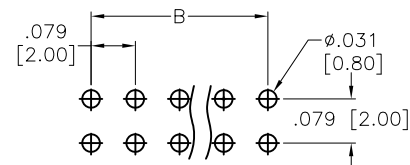

RECOMMENDED PCB LAYOUT

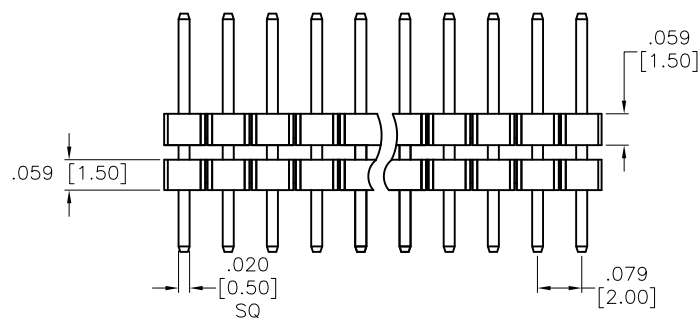

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 4 thru 80

A = .079 [2.00] x No. of Positions

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS DATE

DRAWN AY 4/16/20

CHECKED EY 4/16/20

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 [2.00] DUAL ROW PIN HEADER
DUAL INSULATOR, HIGH TEMPERATURE

SIZE X	PART NO. D2PH-2-10-U-.166/.160/.130-L-HT	REV. -
-----------	---	-----------

REF: S00111C	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------