

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/25/07	

6

5

4




3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

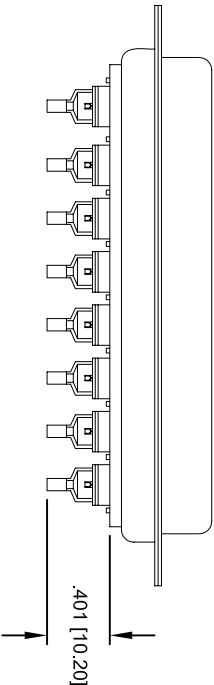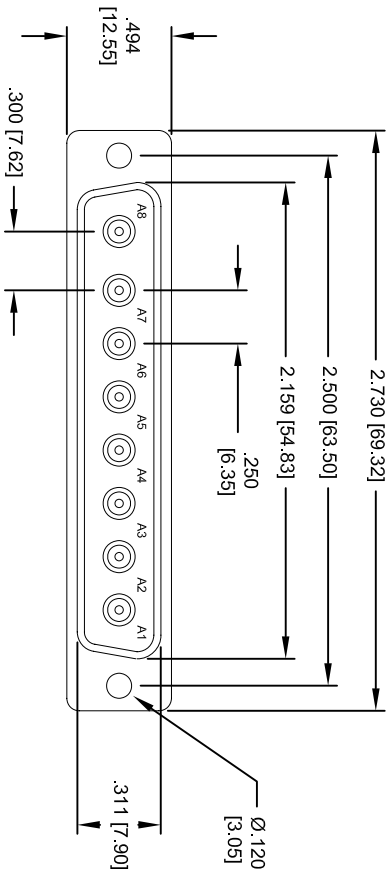

SPECIFICATIONS:

Material:

Insulator: PBT, 30% glass reinforced, rated UL 94V-0

Insulator color: Black

Coax Insulator: Teflon, rated UL 94V-0

Contacts: Brass

Shell: Steel, Tin plated

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 300 VAC max

Current rating: 40 Amps max @ 50 Hz

Coax Contact Impedance: 75 Ohms

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
COMBO D-SUB, 8W8 COAX CONFIGURATION,
FEMALE, VERTICAL SOLDER CUP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
X				± .10				Ø.X			
XX				± .020				Ø.XXX			
XXX				± .015				Ø.XXX			
APPROVALS				DATE							
DRAWN				SS				6/25/07			
CHECKED											
APPROVED											
SIZE				PART NO.				REV.			
X				D8W8-SCD-1				-			
REF:				SCALE: NTS				SHEET 1 OF 1			