


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/5/12	

APPROVED: _____

DATE: _____ TITLE: _____

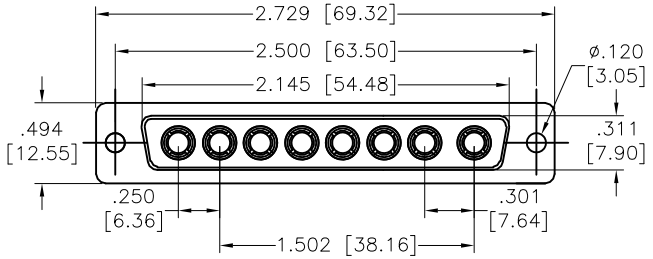



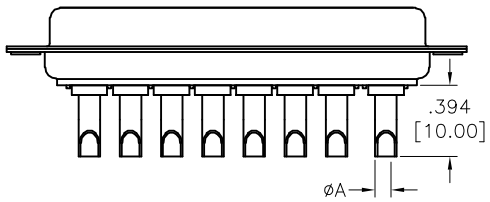

ADAM P/N	Current Rating	Dim øA	Dim øB
D8W8-SDP-6-1	40 Amps	ø.181 [4.60]	ø.217 [5.50]
D8W8-SDP-5-1	30 Amps	ø.146 [3.70]	ø.181 [4.60]
D8W8-SDP-4-1	20 Amps	ø.106 [2.70]	ø.142 [3.60]
D8W8-SDP-3-1	10 Amps	ø.067 [1.70]	ø.098 [2.50]

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, glass filled, rated UL 94V-0
Insulator color: White
Contacts: Brass
Shell: Steel, Tin plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 10 - 40 Amps
Contact resistance: 10 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +125°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/5/12
CHECKED	NP	3/5/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
D-SUB CONNECTOR, SIGNAL-POWER TYPE, SOCKET, SOLDER CUP, PCB

SIZE	PART NO.	REV.
X	D8W8-SDP-X-1	-

REF: S00019T | SCALE: NTS | SHEET 1 OF 1