

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/25/16	


APPROVED: _____


DATE: _____ TITLE: _____

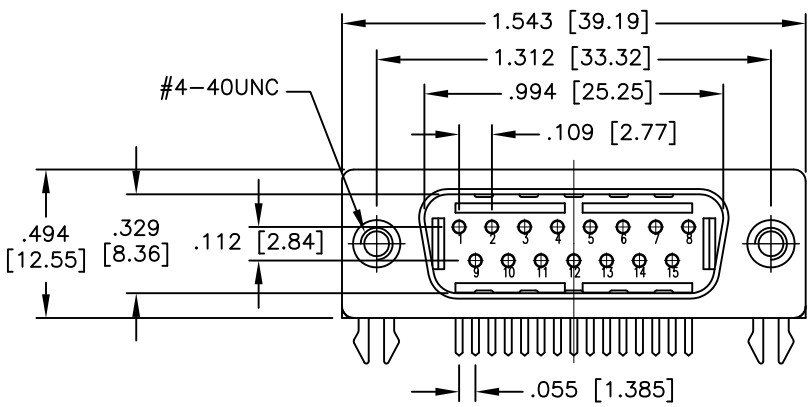

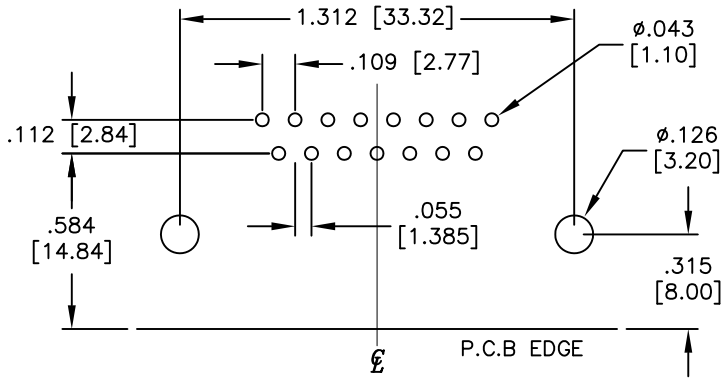

RECOMMENDED PCB LAYOUT

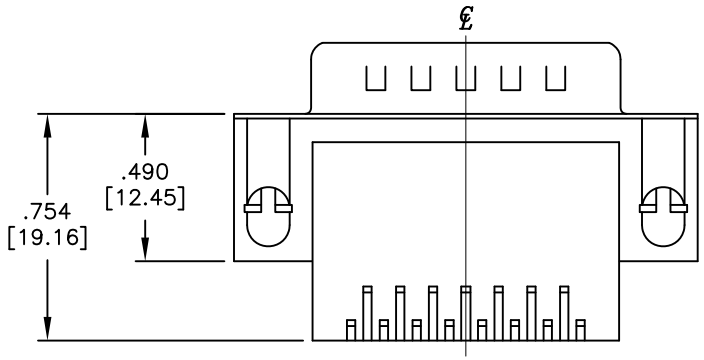

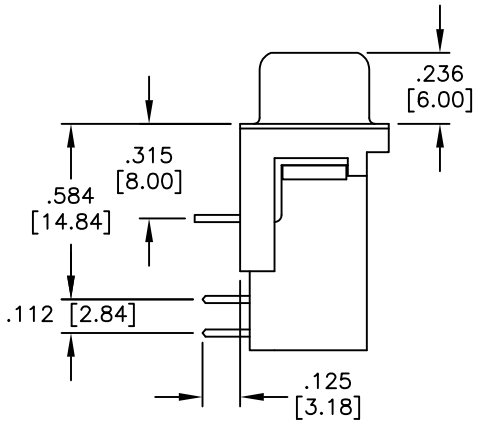

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Shell: SPCC, Nickel plated
Boardlock: Copper Alloy, Tin plated
Rivet: Copper Alloy, Nickel plated
Plating:
30u" Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
Electrical:
Voltage: 250 VAC(RMS) max
Current rating: 3 Amps per Contact
Contact resistance: 25 mohms max
Insulation resistance: 5000 Mohms min
Dielectric withstanding voltage: 1,000 VAC(RMS)
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	10/25/16
CHECKED	DH	10/25/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, MALE, 15 POSITION, RIGHT ANGLE
#4-40 THREADED INSERT, 30u" SEL-GOLD

SIZE	PART NO.	REV.
X	DA15-PQ-F4-30	-

REF: S00027T | SCALE: NTS | SHEET 1 OF 1