


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	


APPROVED: _____

DATE: _____ TITLE: _____

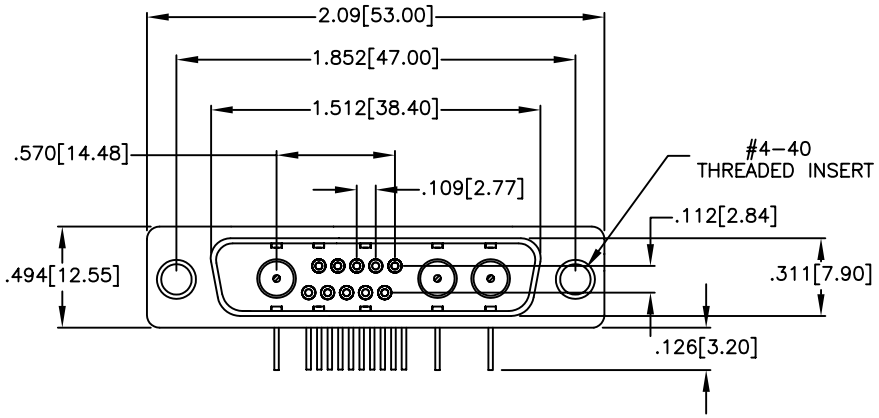



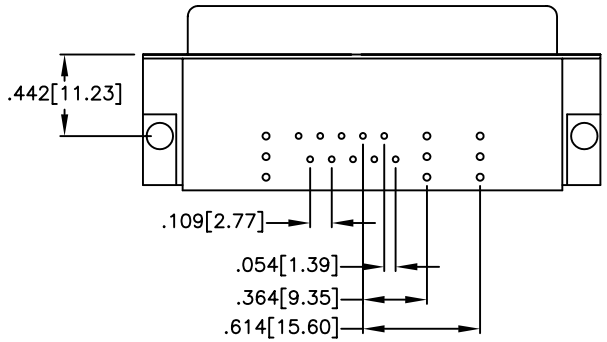

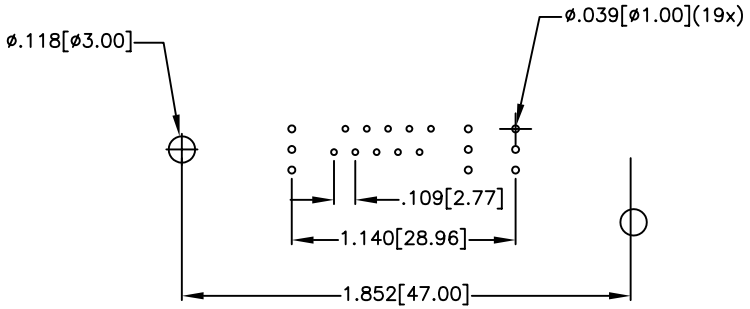

RECOMMENDED
PC BOARD LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shell: Steel, Nickel plated
Plating:
15u" Gold nom over Nickel underplate on contact area, Gold Flash over Nickel underplate on solder tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Capacitance: 2pF max between adjacent contacts
Operating frequence: 0 – 300 MHz
Impedance: 75 ohms
VSWR: 1.2 max
Temperature Rating:
Operating temperature: -65°C to +125°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 230 for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/22/04
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, D13W3, TEN SIGNAL / 3 COAX
RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	DB-SCL-14-15	-

REF: | SCALE: NTS | SHEET 1 OF 1