
Rev	AWO #	Description	Date	Appr
-		RELEASED	3/23/21	

APPROVED: _____

DATE: _____ TITLE: _____

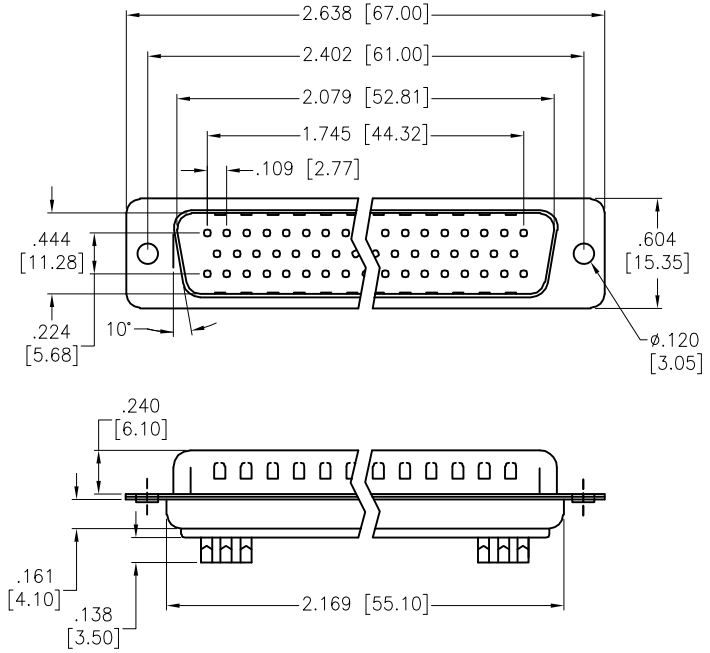

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Front Shell: Steel, Tin plated
Back Shell: Steel, Tin plated
Plating:
Gold flash over Nickel underplate on contact area
Electrical:
Voltage rating: 250 VAC/rms
Current rating: 5 Amp
Contact resistance: 20 mohms
Insulation resistance: 1,000 Mohms @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC/rms for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	3/23/21
CHECKED	YC	3/23/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: D-SUB PLUG, SOLDER CUP, .120 [3.05] MOUNTING HOLES, MACHINED PIN

SIZE	PART NO.	REV.
X	DD50-PD-MC	-

REF: S00087T | SCALE: NTS | SHEET 1 OF 1