


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/25/13	


APPROVED: _____

DATE: _____ TITLE: _____

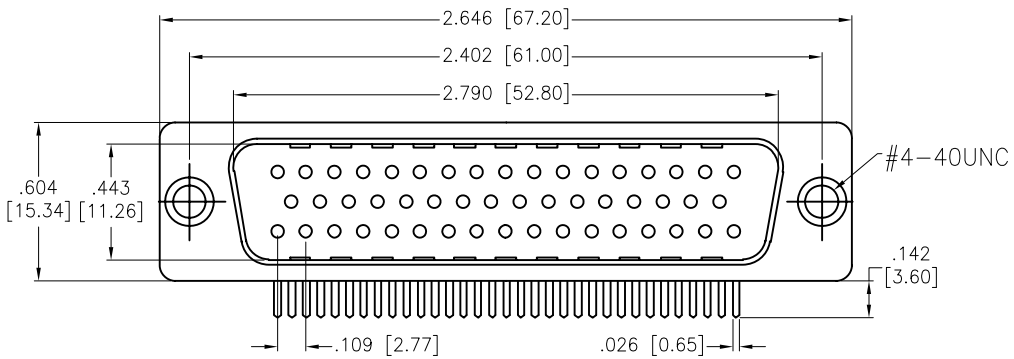



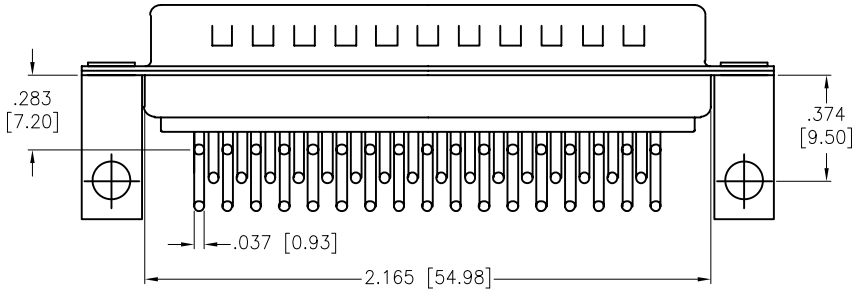

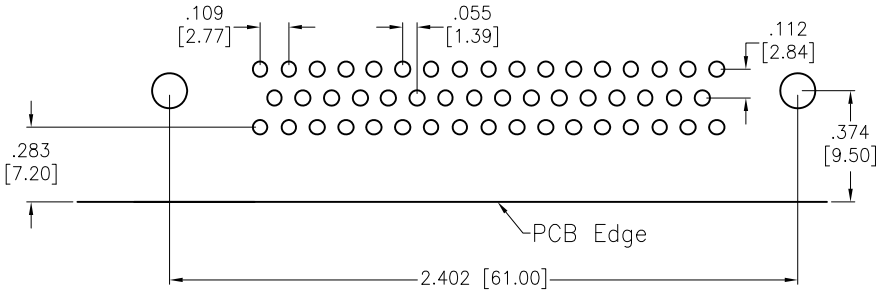

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, glass filled, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Shell: Steel, Tin plated
Metal Bracket: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Contact resistance: 10 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/25/13
CHECKED	NP	4/25/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUBMINIATURE 50PINS, .283" [7.20] FOOTPRINT METAL BRACKET WITH #4-40 THRAEADED INSERTS

SIZE	PART NO.	REV.
X	DD50-PH-C3AM	-

REF: S00019T | SCALE: NTS | SHEET 1 OF 2