
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	04/10/13	
A		REVISED DIM.	9/13/18	AY/RT

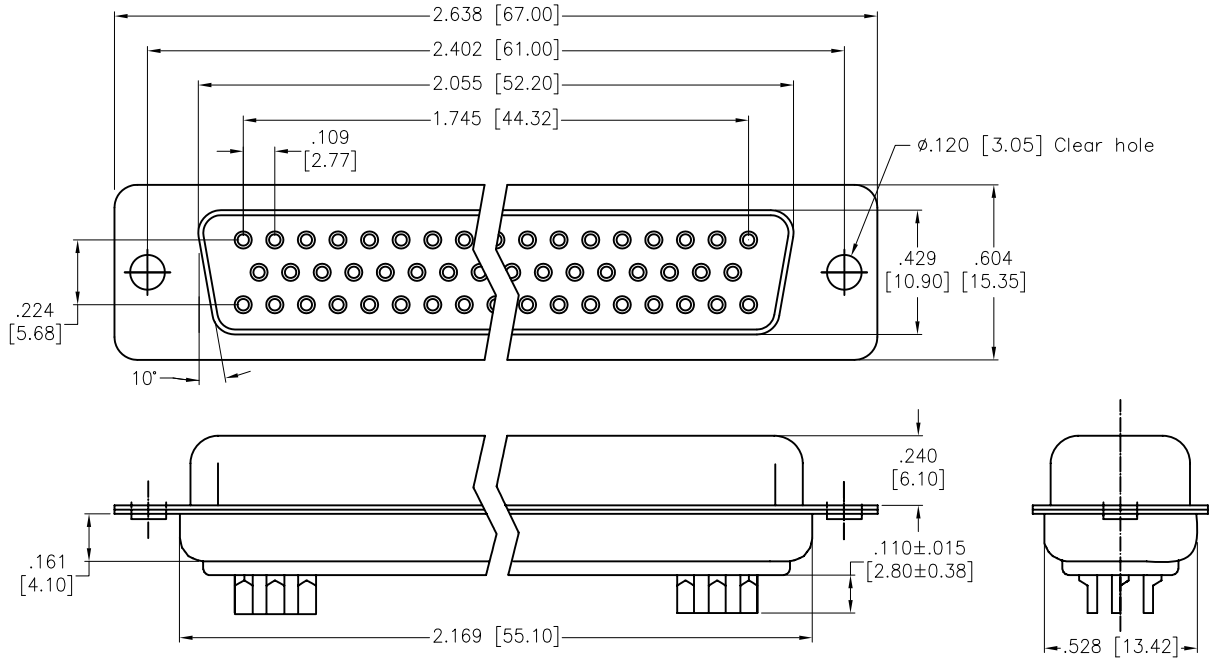

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Shell: Steel, Tin plated
Plating:
Gold over Nickel underplate on contact area
Electrical:
Voltage: 250 VAC/RMS
Current rating: 5 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	04/10/13
CHECKED	AH	04/10/13
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 50 POSITION D-SUB SOCKET, SOLDER CUP
.120 [3.05] MOUNTING HOLES, MACHINED PIN

SIZE	PART NO.	REV.
X	DD50-SD-MC	A

REF:	SCALE:	SHEET
S00087T	NTS	1 OF 1