

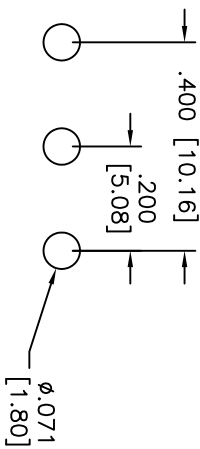


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/13	

APPROVED: _____
DATE: _____ TITLE: _____

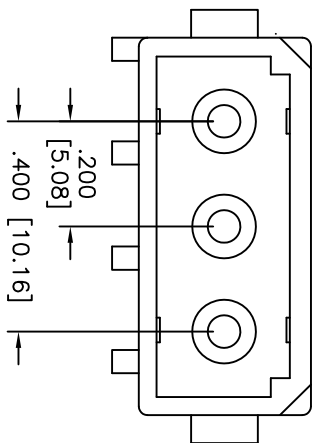

RECOMMENDED PCB LAYOUT

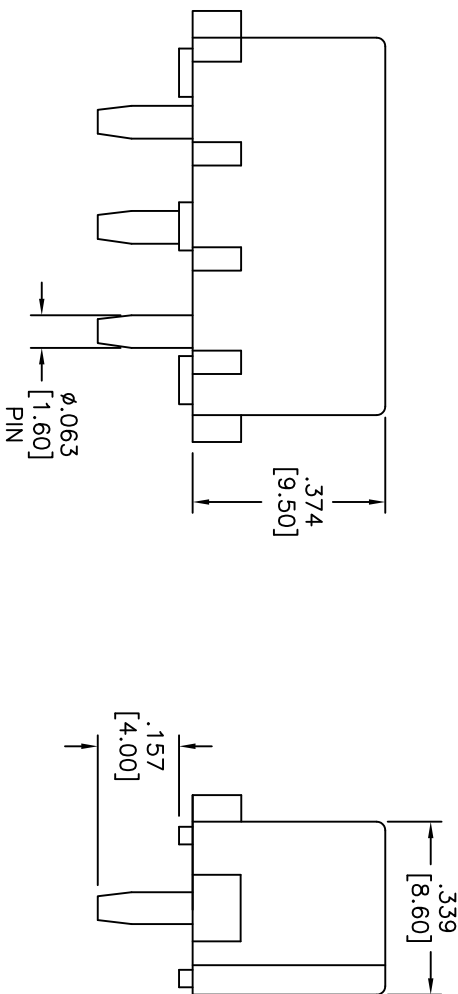

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Brass

Plating:

Tin over nickel underplate

Electrical:

Operation voltage: 250V AC,DC

Current rating: 5A AC,DC

Contact resistance: 10 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 800V AC/minute

Temperature rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead Free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.200 [5.08] MALE STRAIGHT, 3 PIN, PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		10/6/13	SIZE	PART NO.	REV.	
CHECKED	LW		10/6/13	X	DDS-03	-	
APPROVED				REF: S00099T	SCALE: NTS	SHEET 1 OF 1	