


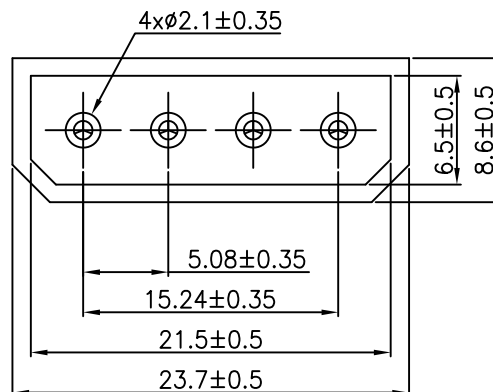


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/2/19	

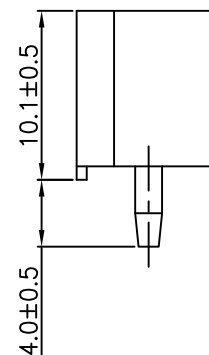

RECOMMENDED PCB LAYOUT

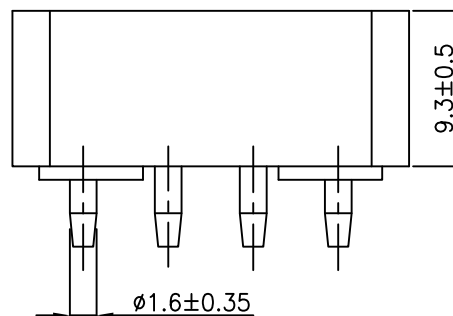

SPECIFICATIONS:

Material:
 Housing: Nylon 66 Thermoplastic, rated UL 94V-2, Color: Natural
 Contacts: Copper Alloy, Ø0.16mm
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Current rating: 5A AC/DC
 Voltage rating: 250V AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE .X ± 0.35 X.* ±2° .XX ± 0.25 .X* ±1° .XXX ± 0.15 .XX* ±0.5°			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			DATE			
DRAWN		OW	12/2/19			
CHECKED		AC	12/2/19			
APPROVED						
TITLE						
MALE STRAIGHT, PCB MOUNT, 4P						
SIZE X		PART NO. DDS-04D			REV. -	
REF: S00119T		SCALE: NTS		SHEET 1 OF 1		