
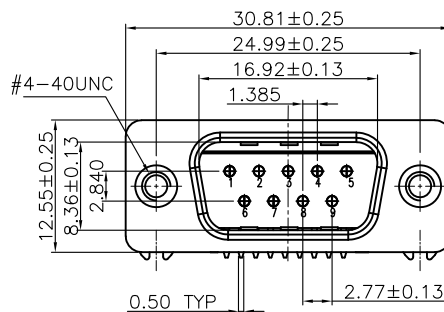

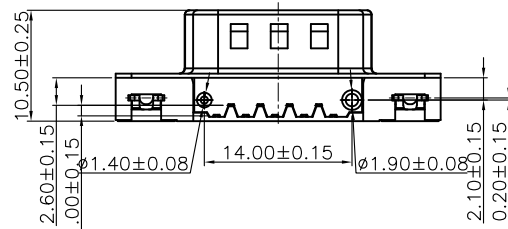



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/09/09	
A		UPDATE DRAWING	9/10/21	WX/RL

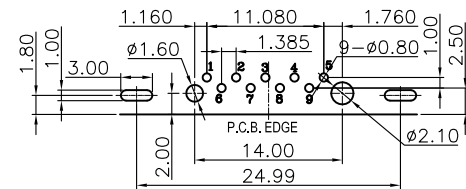

RECOMMENDED PCB LAYOUT

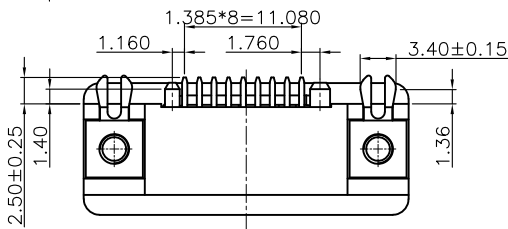

SPECIFICATIONS:

Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Boadlock: Copper Alloy, Tin plated
Shield: SPCC, Nickel plated
Rivet: Copper Alloy, Nickel plated
Plating:

Gold over Nickel underplate on contact area,
Tin over Copper underplate on Solder tails.

Electrical:

Operating voltage: 250 VAC(RMS) max
Current rating: 3 Amp per Contact
Contact resistance: 25 mohms max
Insulation resistance: 1000 Mohms min
Withstanding voltage: 500 VAC(RMS)

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED			ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
MM .XX ± .25 .XXX ± .13	ANGLE .X ± 2°					
DRAWN	DY	12/09/09	TITLE D-SUBMINIATURE, RIGHT ANGLE TWO ROWS PCB TYPE, LOW PROFILE 9 POST MALE			
CHECKED						
APPROVED						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. DE09-PM-24-FP	REV. A	
			REF: S00027T	SCALE: NTS	SHEET 1 OF 1	