

6

5

4

3




2

1


Rev	EWO #	Description	Date	Appr
-	008	Released	8/2/03	

APPROVED: _____

DATE: _____ TITLE: _____

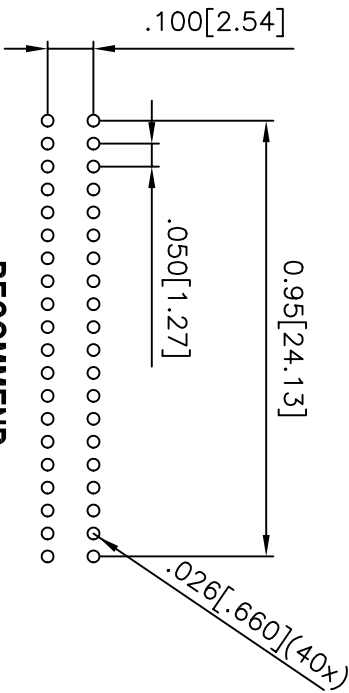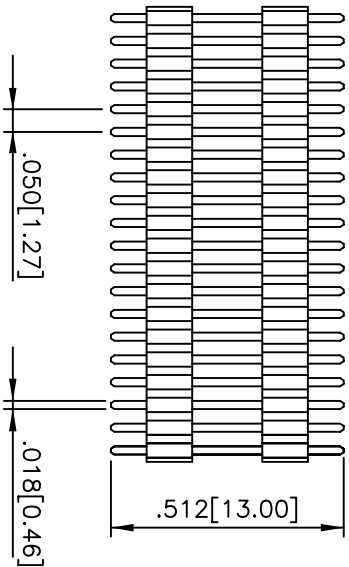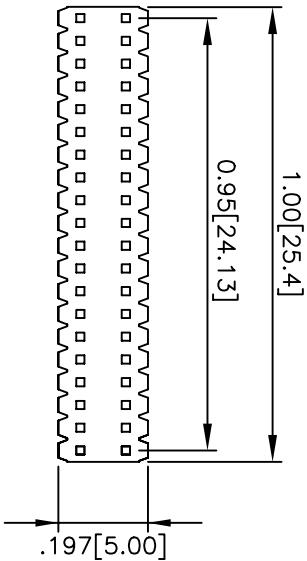

RECOMMEND PC BOARD LAYOUT

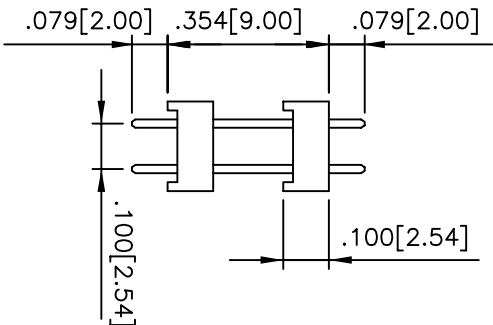

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, Rated UL 94V-0

Contacts: Brass or Phosphor Bronze

Plating:

5 μ in Gold Nom. to MIL-G-45204, Type II, Grade C over

50 μ in Nickel underplate to QQ-N-290, Class 2, Grade C

Electrical:

Operation voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 m Ω max

Insulation resistance: 5000 M Ω min

Dielectric withstanding voltage: 500 VAC

Environmental:

Operating temperature: -40°C to +105°C

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DATE

DRAWN

SLS

8/2/03

CHECKED

APPROVED

ADAM TECH

1.27mm Pitch, Double Insulator,
Pin Header, 40 Position, Gold Plated

TITLE

1.27mm Pitch, Double Insulator,
Pin Header, 40 Position, Gold Plated

SIZE

PART NO.

DHPH-2-40-U-.079/.079/.354

REV.

-

REF:

SCALE: NTS

SHEET 1 OF 1