


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/28/05	
A		REDRAWN	8/7/12	
B		UPDATE DIM.	9/4/18	AY/KC

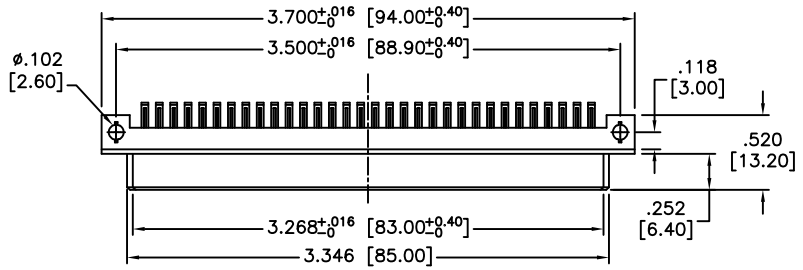

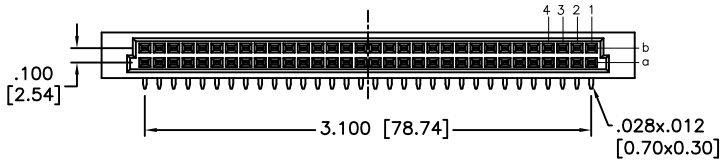

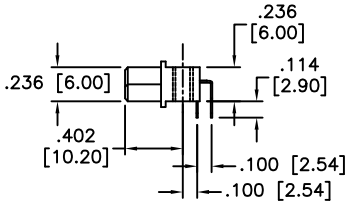

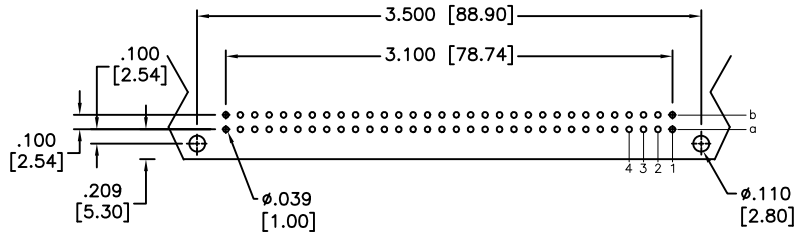

RECOMMENDED PCB LAYOUT

"X"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Beige

Contacts: Copper Alloy

Plating:

X Gold over Nickel on contact area,
Tin over Copper underplate on tails.
See chart

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	03/28/05
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: DIN 41612, 64P FEMALE RIGHT ANGLE 2 ROW, PCB MOUNT

SIZE	PART NO.	REV.
X	DIN-64FR-L22-A1CX-HT	B

REF: S00058T | SCALE: NTS | SHEET 1 OF 1