


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/13	
A		UPDATE DIM.	10/5/20	AY/EY

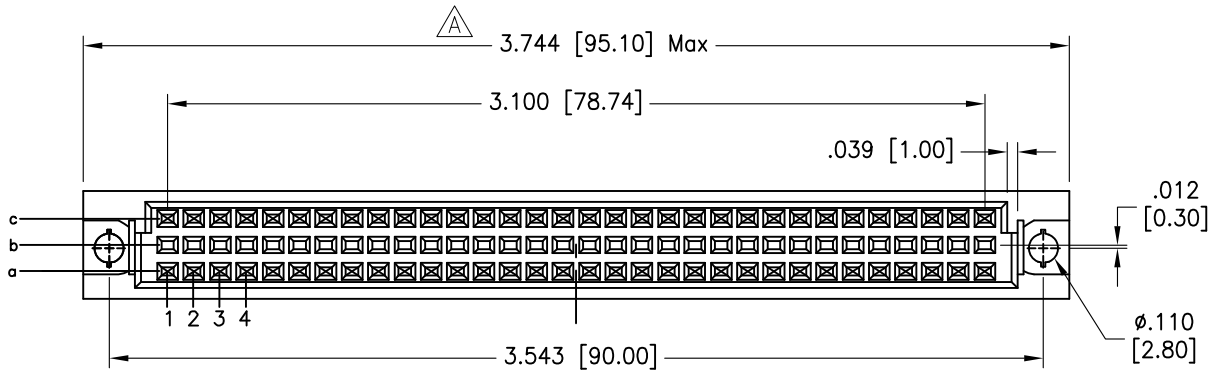

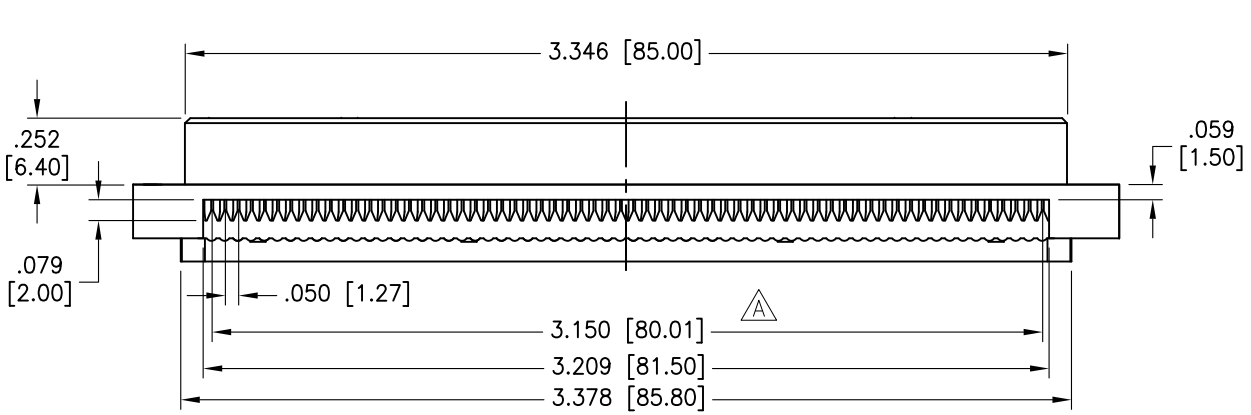

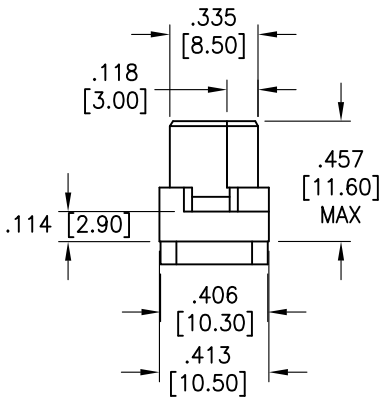

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, glass filled, rated UL 94V–0

Contacts: Copper Alloy

Plating:

X Gold over Nickel underplate on contact area,
Tin over Copper underplate on solder tails.
(See chart for thickness)

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max @ DC 100mA

Insulation resistance: 1000 Mohms min@ DC 500V

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: –55°C to +125°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

"X"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/21/13
CHECKED	CC	2/21/13
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: DIN IDC TYPE FEMALE, 64 PINS LOADED
3 ROW STRAIGHT, ROW A & C LOADED

SIZE	PART NO.	REV.
X	DIN-64FS-L32-ACX-IDC	A

REF: S00058T | SCALE: NTS | SHEET 1 OF 1