


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/24/06	
A		REVISED DIMENSION	5/30/06	
B		REVISED DIMENSION	5/18/10	
C		UPDATE DRAWING	10/16/19	AY/NL

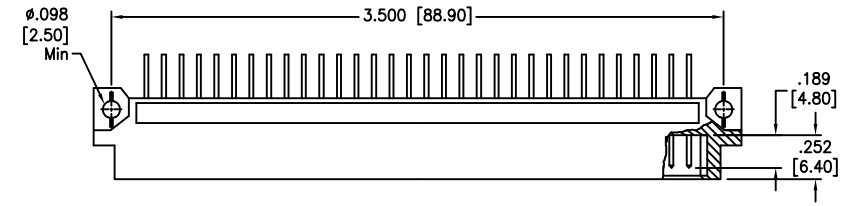

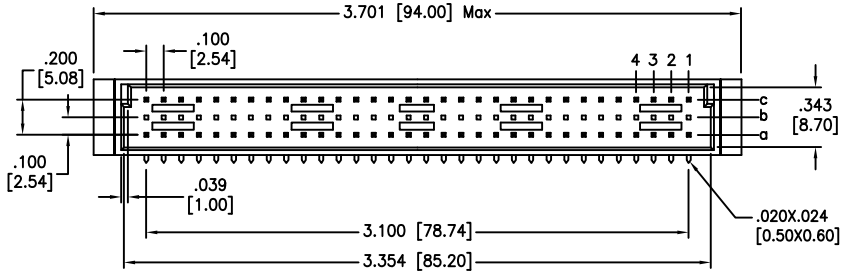



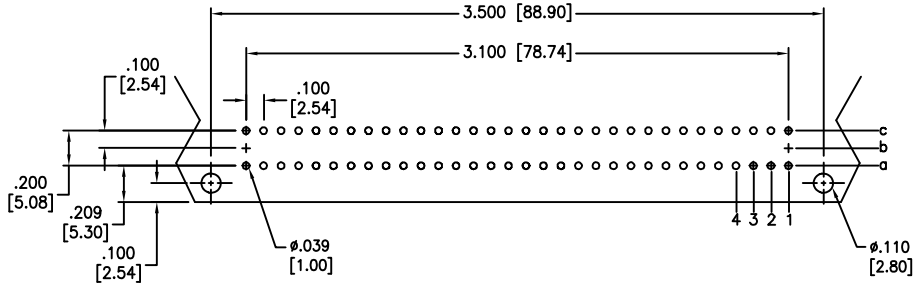

RECOMMENDED PCB LAYOUT

"X"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

SPECIFICATIONS:

Material:
Insulator: PBT, rated UL 94V–0, Color: Beige
Contacts: Brass
Plating:
X Gold over Nickel underplate on contact area,
Tin over Copper underplate on solder tails.
(See chart for thickness)
Electrical:
Current rating: 2 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min@ DC 500V
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/24/06
CHECKED		
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: DIN 41612, 96 POSITION MALE R/A, ROW A & C LOADED, 64 PINS, PCB MOUNT

SIZE	PART NO.	REV.
X	DIN-64MR-L32-A1CX	B

REF: S00058T | SCALE: NTS | SHEET 1 OF 1