
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/04/06	
A		REDRAWN	9/5/12	
B		REVISED SHAPE	1/17/14	AY/EH

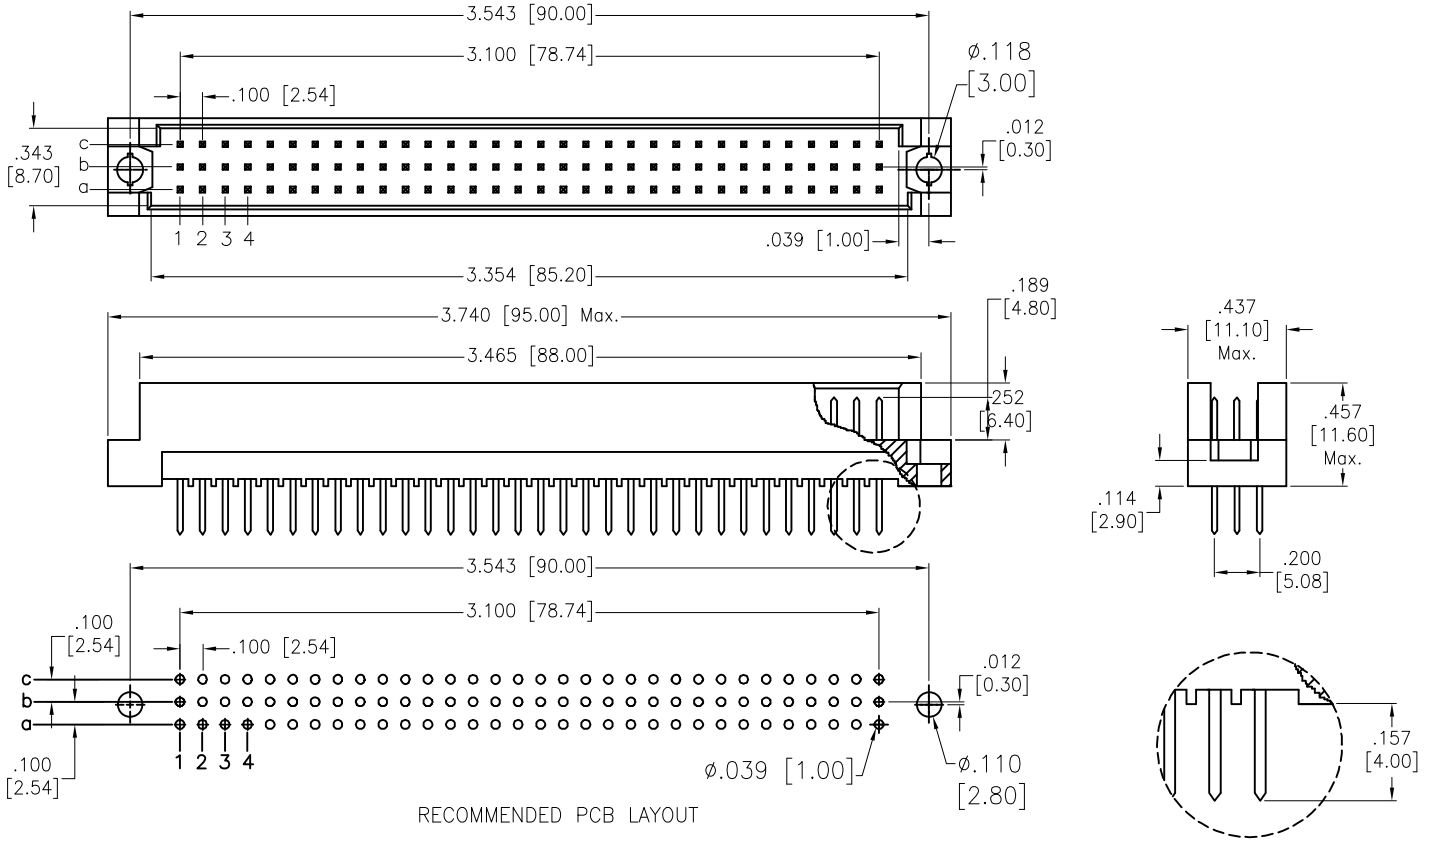

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Contacts: Copper Alloy
Plating:
X Gold over Nickel underplate on contact area,
Tin over Copper underplate on solder tails.
(See chart for thickness)
Electrical:
Current rating: 2 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min@ DC 500V
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

"X"	PLATING
C1	30 u" Gold
C2	15 u" Gold
C3	Gold Flash

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	02/27/13
CHECKED	CC	02/27/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 96P MALE STRAIGHT PCB MOUNT

SIZE	PART NO.	REV.
X	DIN-96MS-L33-A1CX	B

REF: S00058T | SCALE: NTS | SHEET 1 OF 1