


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/08	
A		UPDATED SPEC.	1/24/18	HR/IC

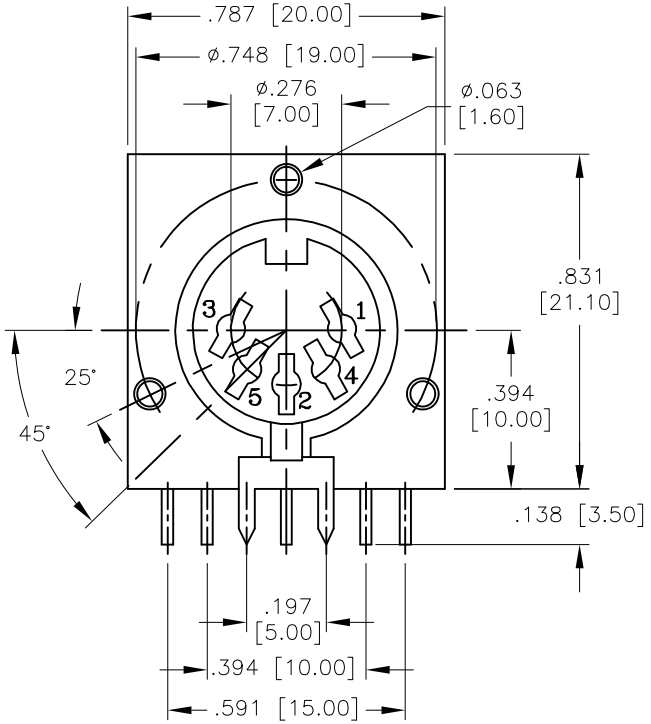

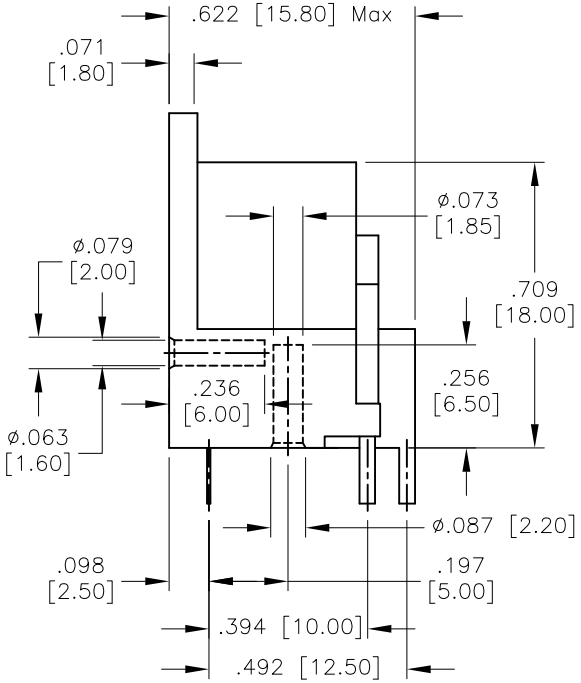

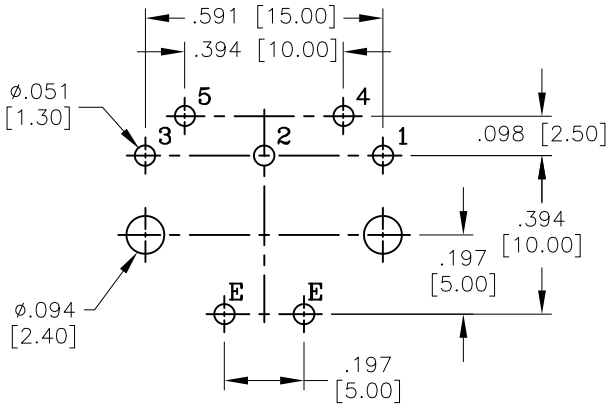

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V–0

Insulator color: Black

Contacts: Brass

Insulation Board: PE

Plating:

Tin over Copper underplate overall

Electrical:

rating: 100VAC, 1A / 24VDC, 2A

Contact resistance: 30 mohms max

Insulation resistance: 50 Mohms @ 250 VDC

Dielectric withstanding voltage: 250 VACrms for 1 minute

Temperature Rating:

Operating temperature: –40°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/18/13
CHECKED	LW	3/18/13
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: DIN JACK, NON-SHIELDED, 3 HOLES
.197 [5.00] CENTERLINE FRONT PINS

SIZE	PART NO.	REV.
X	DJ-005-.5-3H-A	A

REF:	SCALE:	SHEET
S00250T	NTS	1 OF 1