
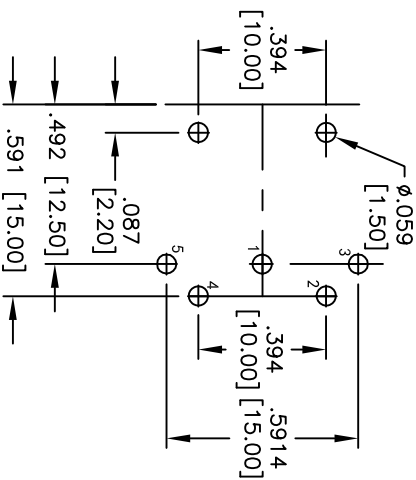


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	
A		CORRECTED DIMENSIONS	10/30/06	
B		REVISED SHAPE	6/14/12	
C		REVISED SHAPE	6/17/14	
D		REVISED SHAPE	7/22/14	AVYYC

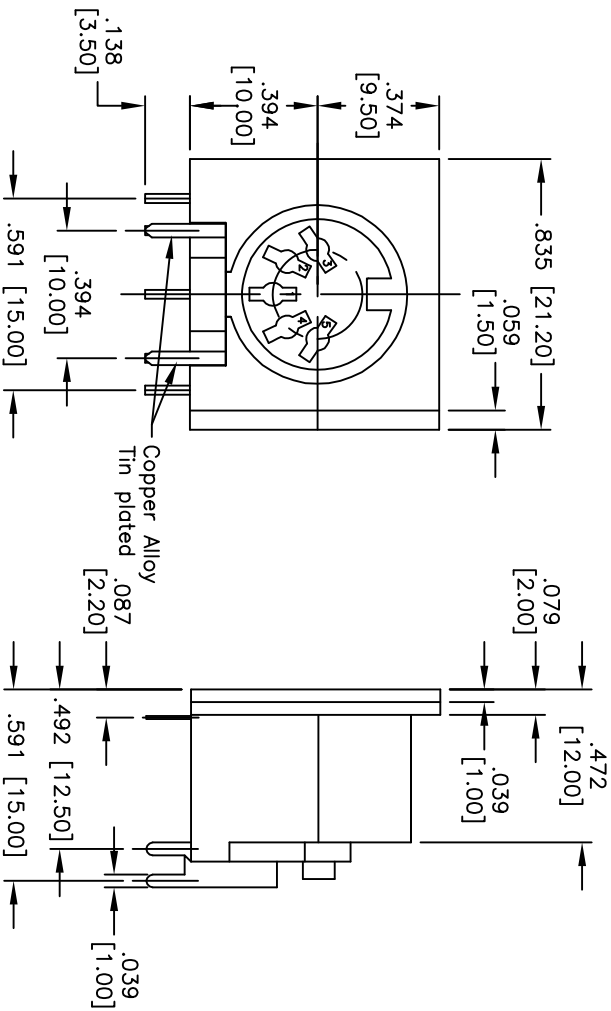

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: Black

Cover: PF, rated UL 94V-0, color: Black

Contacts: Copper Alloy

Plating:

Silver over Copper underplate overall

Electrical:

Operating voltage: 100 VAC/ 24VDC.

Current rating: 2 Amps/1 Amps max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min.


Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DIN JACK, 5 POSITIONS,

.394 [10.00] CENTERLINE FRONT PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
.X INCHES ± .10	ØXX HOLE ± .10	.XX ± .020	ØXXX ± .015	APPROVALS	DATE	SIZE	PART NO.
.XXX ± .015	ØXXX ± .010			DRAWN	SS	10/4/04	
				CHECKED			
				APPROVED			

REV.	D
REF:	S00230T
SCALE:	MKS
SHEET	1 OF 1