Rev	AWO #	Description	Date	Appr
-		RELEASED	9/11/15	

APPROVED: _____

DATE: _____ TITLE: _____

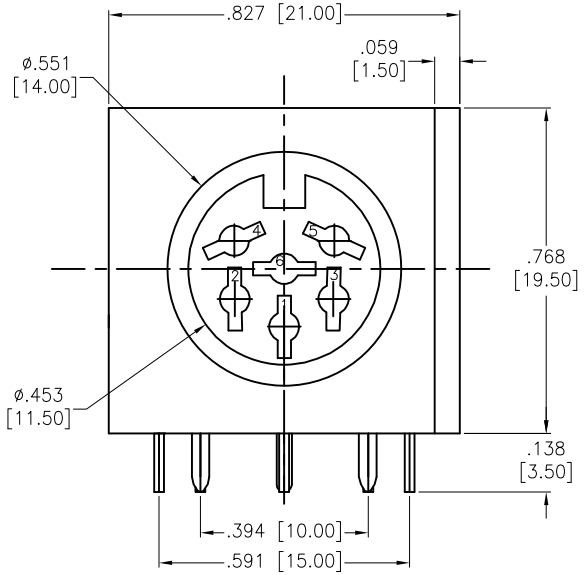

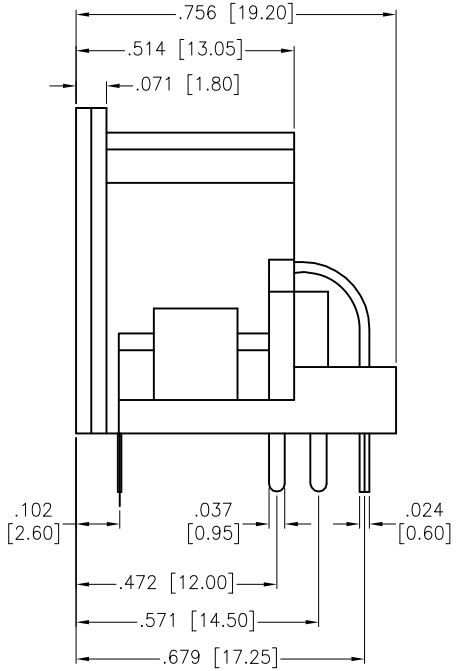

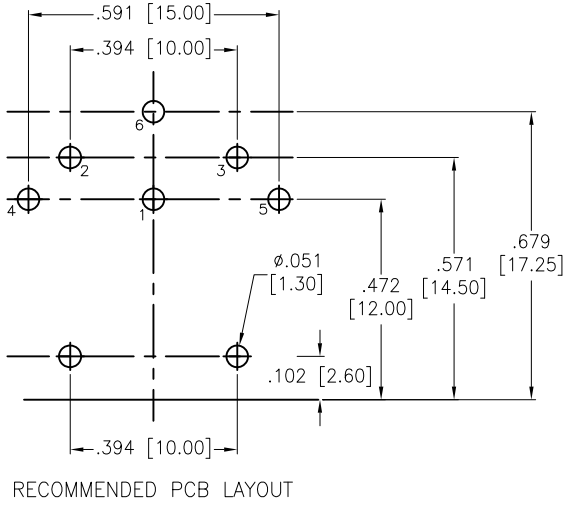

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Black
Terminal: Copper Alloy
Plating:
Silver over Copper underplate overall
Electrical:
Operating voltage: 100 VAC or 24VDC max.
Current rating: AC 2 Amps or DC 1 Anps max.
Contact resistance: 30 mohms max. (Pin–Contact)
50 mohms max. (Plug Cover–Socket)
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	9/11/15
CHECKED	YC	9/11/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN JACK, 6 POSITIONS, NON-SHIELDED, .394 [10.00] CENTERLINE FRONT PINS

SIZE	PART NO.	REV.
X	DJ-006	-

REF: S00250T | SCALE: NTS | SHEET 1 OF 1