

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/22/14	

APPROVED: _____

DATE: _____ TITLE: _____

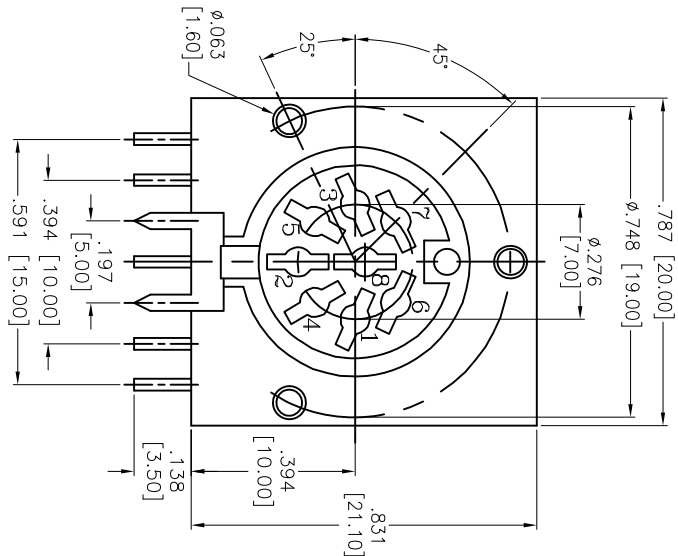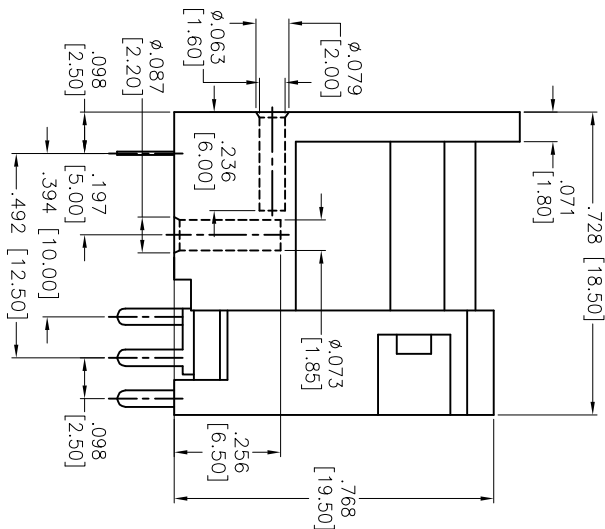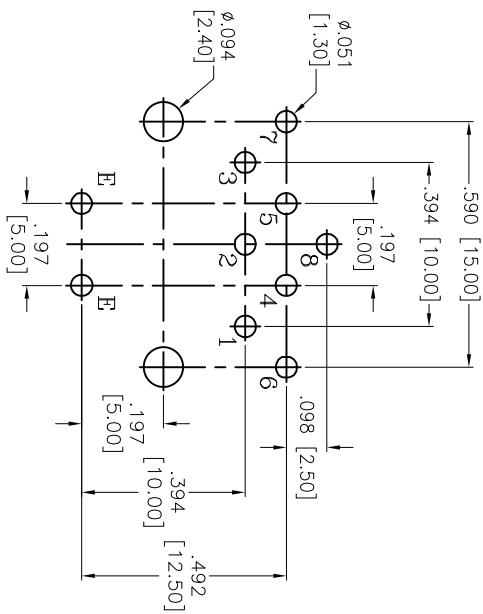

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: PBT, rated UL 94V-0
Insulator color: Black
Terminal: Brass
Earth Terminal: Brass
Plating: Tin over Copper underplate overall
Electrical:
Operating voltage: 100 VAC or 24VDC max.
Current rating: AC 2 Amps or DC 1 Amps max.
Contact resistance: 30 mohms max. (Pin-Contact)
50 mohms max. (Plug Cover-Socket)
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN JACK, RIGHT ANGLE, CLOSED BACK
NON SHIELDED, 5MM CENTERLINE FRONT PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	Ø.X	± .10	.XXX	± .020	Ø.XXX	± .015	.XXX	± .015	Ø.XXX	± .010
APPROVALS				DATE							
DRAWN	AY	7/22/14		DATE							
CHECKED	YC	7/22/14									
APPROVED											

SIZE	PART NO.	REV.
X	DJ-008-5-3H	-

REF: S00250T SCALE: NTS SHEET 1 OF 1