


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/15	

APPROVED: _____


DATE: _____ TITLE: _____

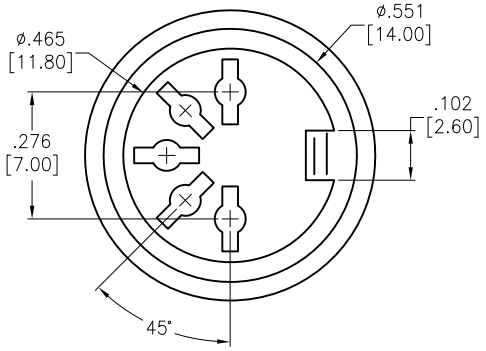

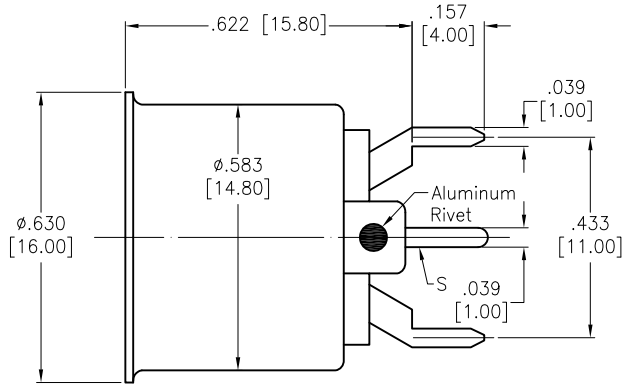

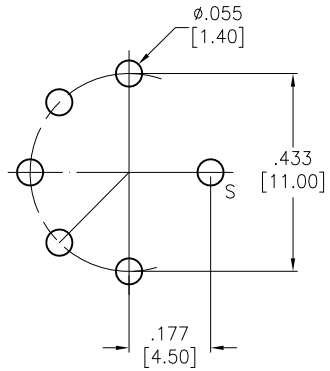

RECOMMENDED PCB LAYOUT
BOTTOM VIEW

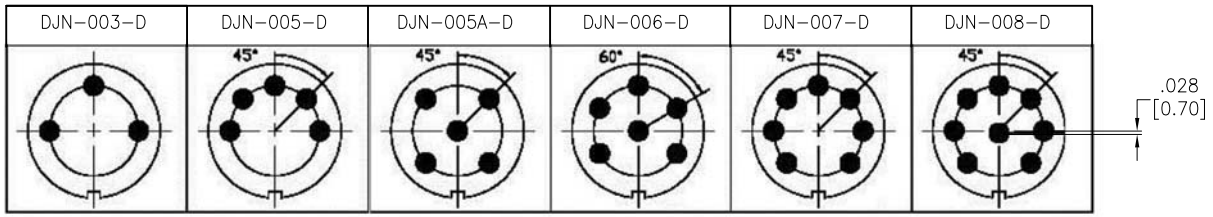

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contact: Brass, Silver Plated
Sleeve: Phosphor Bronze, Silver Plated
Cover: Iron Sheet, Nickel plated
Electrical:
Voltage rating: 24 VDC
Current rating: 1.0 Amps
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Mechanical:
Insertion Force: 0.5~5.5Kgf.
Withdrawal Force: 0.5~5.5Kgf.
Temperature Rating:
Operating temperature: -20°C to +60°C
Temperature Rating:
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/3/15
CHECKED	SL	9/3/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BARREL TYPE STRAIGHT, PCB MOUNT CIRCULAR DIN JACK

SIZE	PART NO.	REV.
X	DJN-00X-D	-

REF: S00072T | SCALE: NTS | SHEET 1 OF 1