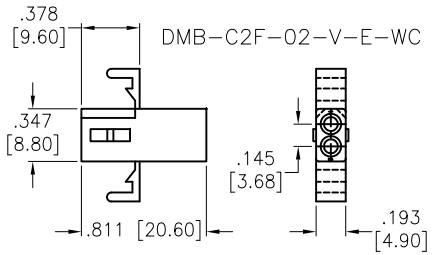
| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 3/26/18 | |

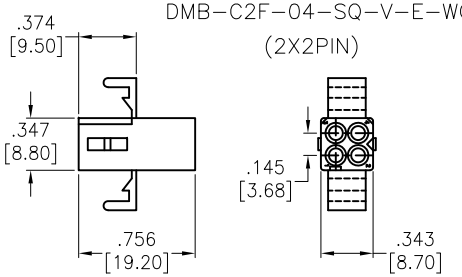
APPROVED: _____

DATE: _____ TITLE: _____

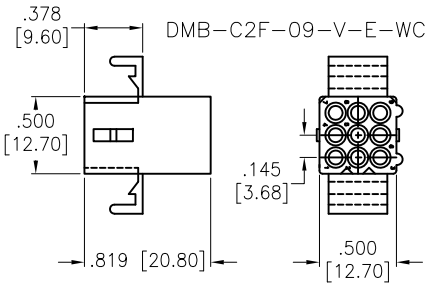
DMB-C2F-02-V-E-WC



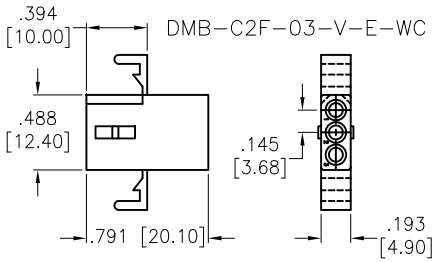

DMB-C2F-04-SQ-V-E-WC
(2X2PIN)



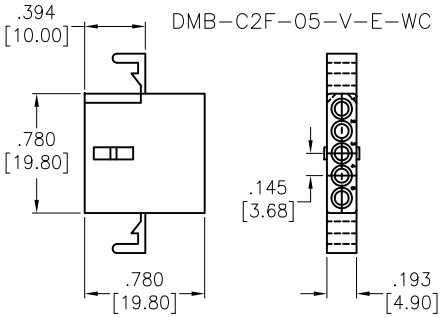

DMB-C2F-09-V-E-WC



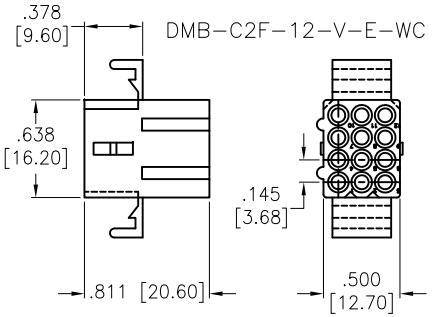

DMB-C2F-03-V-E-WC



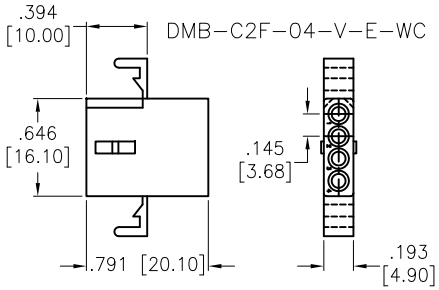

DMB-C2F-05-V-E-WC



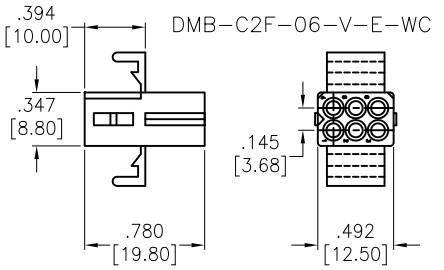

DMB-C2F-12-V-E-WC



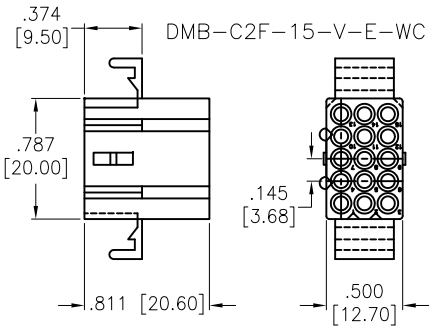

DMB-C2F-04-V-E-WC




DMB-C2F-06-V-E-WC




DMB-C2F-15-V-E-WC




**SPECIFICATIONS:**

Material:
Insulator: Nylon66, rated UL94V-2
Insulator color: Natural

Electrical:
Voltage rating: 250V AC/DC
Current rating: 5A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Withstand voltage: 1,500 VAC for 1 minute

Temperature Rating:
-40°C to +105°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | HR | 3/26/18 |
| CHECKED | DH | 3/26/18 |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE: .145 [3.68] PITCH CONNECTOR HOUSINGS, FEMALE, VERTICAL, CONVEX, EAR

| SIZE | PART NO. | REV. |
|---|---|---|
| X | DMB-C2F-XX-V-E-WC | - |

REF: S00124T | SCALE: NTS | SHEET 1 OF 1