
Rev	AWO #	Description	Date	Appr
-		RELEASED	4/11/18	


APPROVED: _____

DATE: _____ TITLE: _____


DMB-C2M-02-V-E

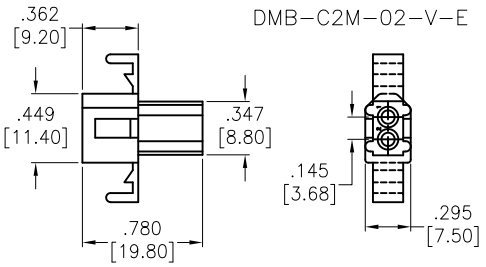


DMB-C2M-04-V-E

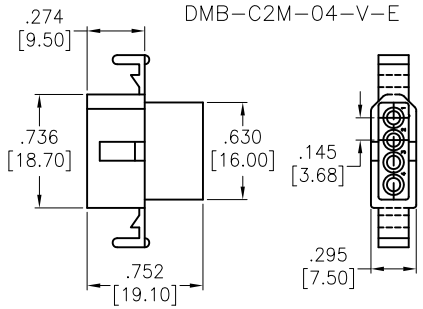


DMB-C2M-09-V-E

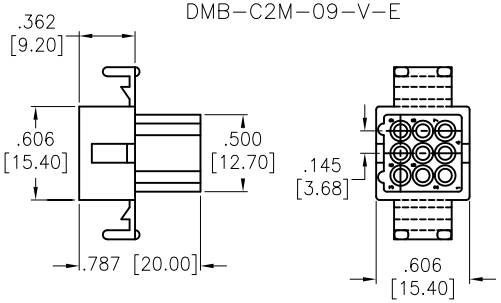


DMB-C2M-03-V-E

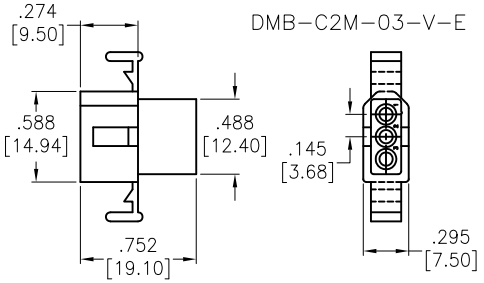


DMB-C2M-05-V-E

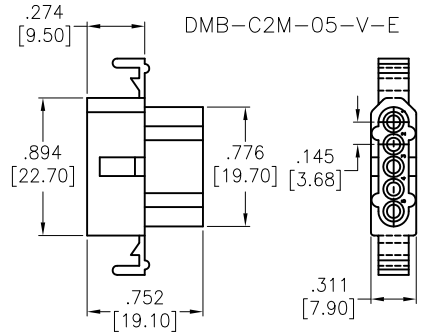


DMB-C2M-12-V-E

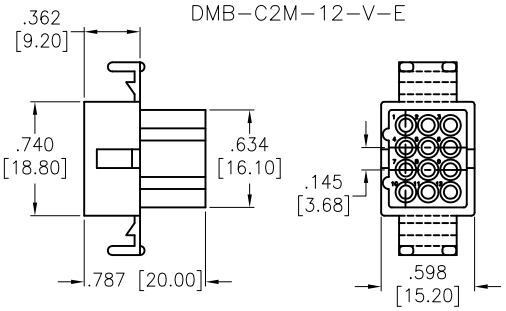


DMB-C2M-04-SQ-V-E
(2X2PIN)

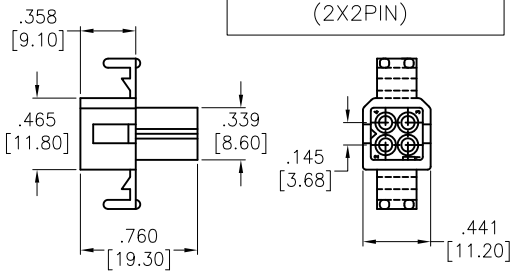

DMB-C2M-06-V-E

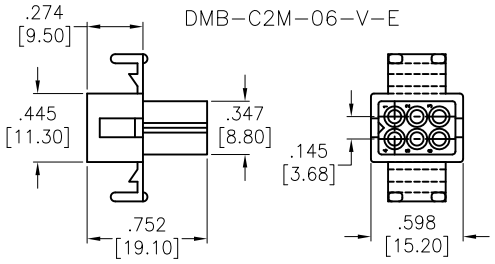

DMB-C2M-15-V-E

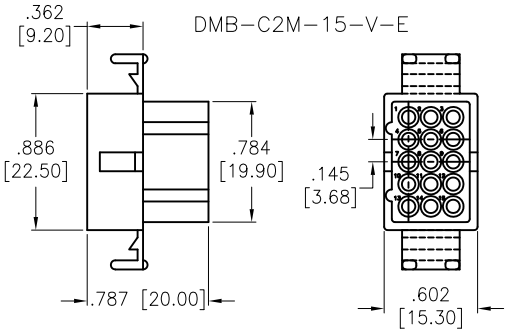

SPECIFICATIONS:

Material:
Insulator: Nylon66, rated UL94V-2
Insulator color: Natural

Electrical:

Voltage rating: 250V AC/DC
Current rating: 5A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	4/11/18
CHECKED	DH	4/11/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .062"(1.58MM) DIA, 3.68MM PITCH CONNECTOR HOUSINGS, MALE, VERTICAL, EARS

SIZE	PART NO.	REV.
X	DMB-C2M-XX-V-E	-

REF: S00124T | SCALE: NTS | SHEET 1 OF 1