

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

4/15/19

D

D

C




C

B


B

A


A

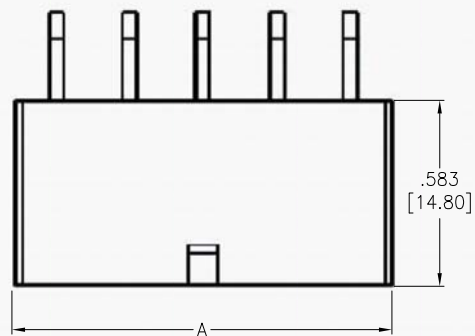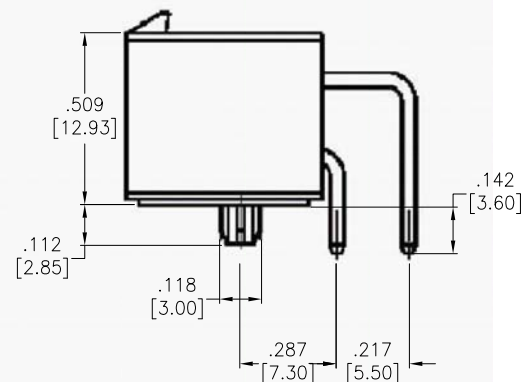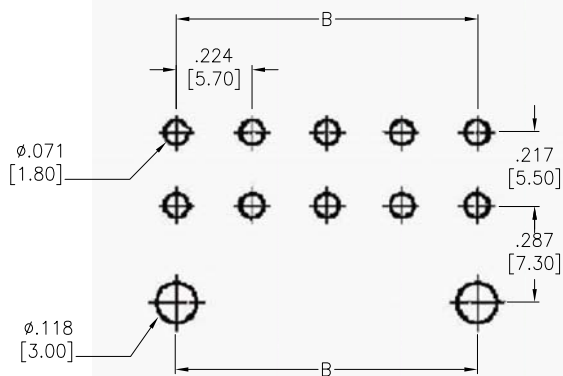


06~12 PIN



04 PIN

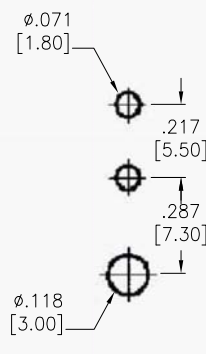

02 PIN

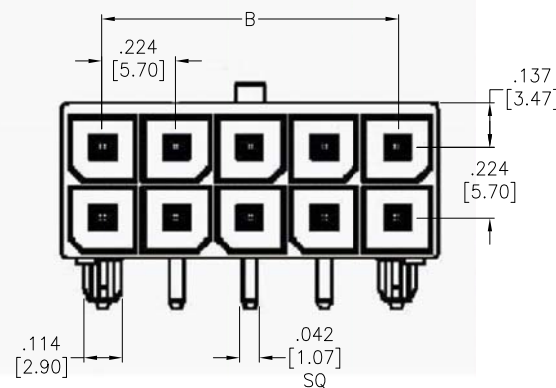

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Brass, Matte Tin plated

Electrical:

Voltage rating: 600 VAC/DC

Current rating: 23 A AC/DC

Contact resistance: 2 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 2,200 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 12

A = .224 [5.70] x No. of Spaces + .250 [6.35]

B = .224 [5.70] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE

DRAWN

OW

4/15/19

CHECKED

DH

4/15/19

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

.224 [5.70] RIGHT ANGLE PCB HEADER WITH PEGS

SIZE

X

PART NO.

DMB-LF-XX-A-H-MT-A-HT-V0

REV.

-

REF: S00123T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1