
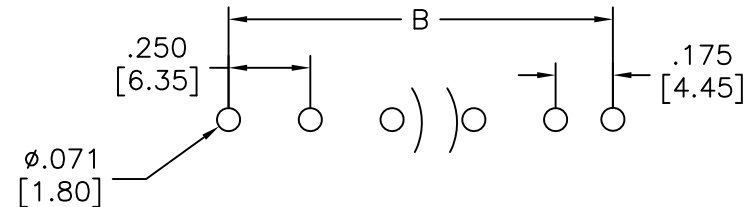
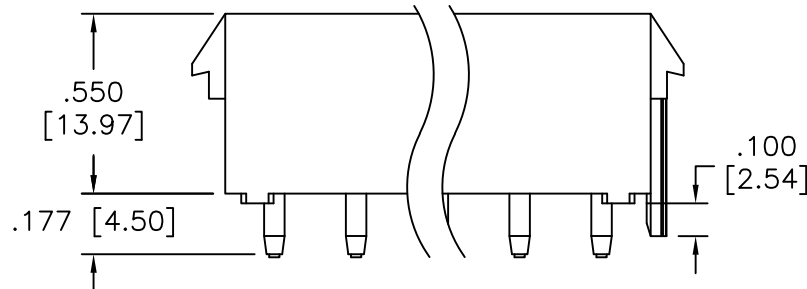


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/03/11	

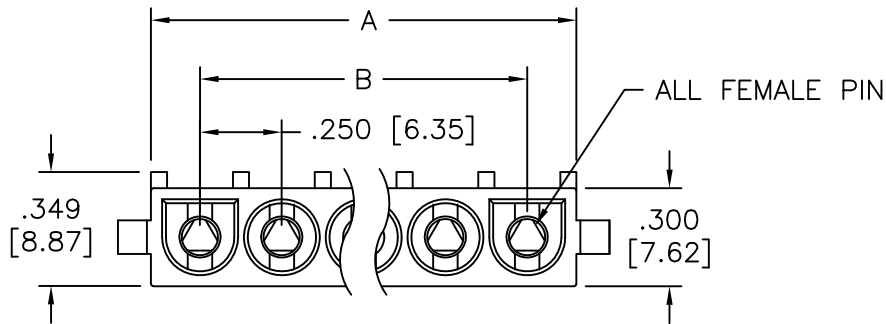

Recommended PCB Layout

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 600 V

Current rating: 2~4P: 13A, 6~10P: 11A

Dielectric withstanding voltage: 5000 VAC for 1 minute

Temperature Rating:

-55°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 10

A = .250 [6.35] x No. of Positions + .050 [1.27]

B = .250 [6.35] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	TW	11/03/11
CHECKED	AY	11/03/11
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE WIRE TO BOARD, FEMALE, 6.35mm PITCH
 WITH POLARIZING, SINGLE ROW TYPE

SIZE X	PART NO. DME-F-XX-S-P-S-V0	REV. -
REF: S00123T	SCALE: NTS	SHEET 1 OF 1