


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/8/22	

APPROVED: _____

DATE: _____ TITLE: _____

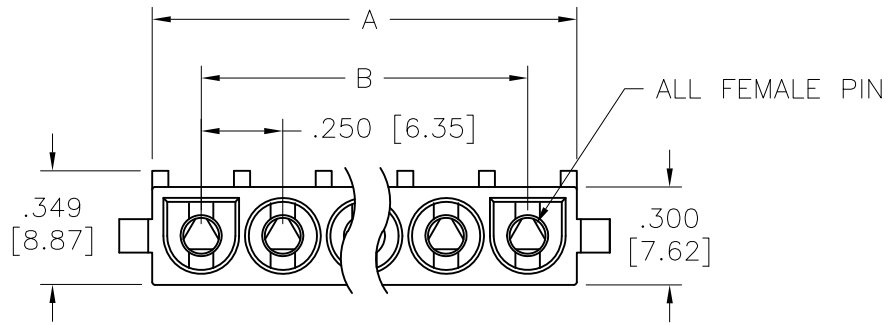

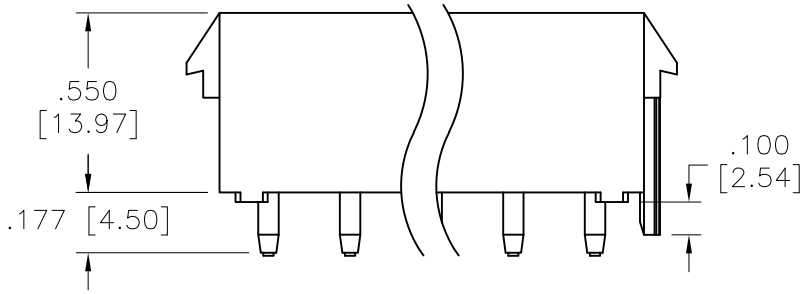

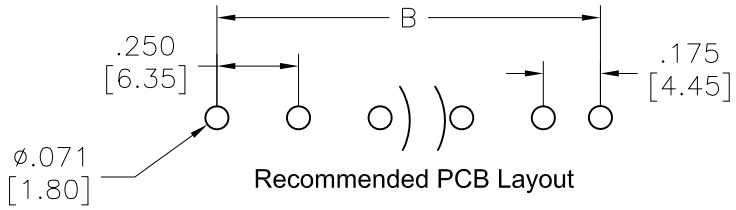

Recommended PCB Layout

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0, Glow Wire Compliant

Insulator color: White

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 600 V

Current rating: 2~4P: 13A, 6~10P: 11A

Dielectric withstanding voltage: 5000 VAC for 1 minute

Temperature Rating:

−55°C to +105°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 02 thru 10

A= .250 [6.35] x No. of Positions + .050 [1.27]

B= .250 [6.35] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	8/8/22
CHECKED	YC	8/8/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH WITH POLARIZING, SINGLE ROW TYPE

SIZE	PART NO.	REV.
X	DME-F-XX-S-P-S-V0-GW	-

REF: S00123T | SCALE: NTS | SHEET 1 OF 1