


Rev	AWO #	Description	Date	Appr
-		RELEASED	01/27/14	

APPROVED: _____

DATE: _____ TITLE: _____

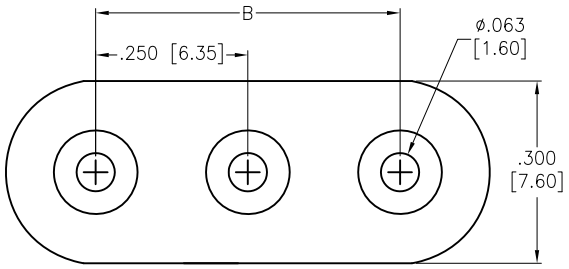

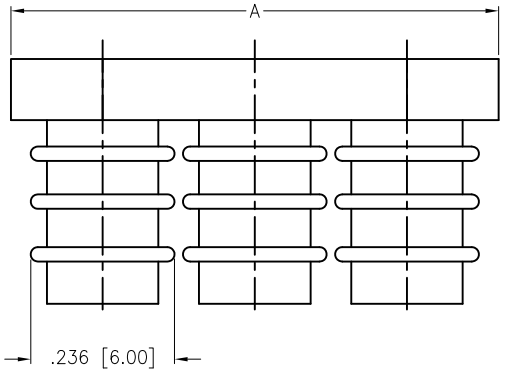



Positions: 02 thru 04
A= .250 [6.35] x No. of Spaces + .301 [7.65]
B= .250 [6.35] x No. of Spaces

Technical Requirements:
.110–.130 [2.79–3.30] insulation diameter passed
European IP sealing level #5/7(swirling dust/immersion to 1 meter for 30 minutes)

.060–1.30 [1.52–2.79] insulation diameter passed
European IP sealing level #5/6(swirling dust/heavy seas)

Wire AWG range is #20–14 with insulation diameter range .060–.130 [1.52–3.30]

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	01/27/14
CHECKED	YC	01/27/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.250 [6.35] PITCH SEALING APRONS

SIZE	PART NO.	REV.
X	DME-M-XX-SA1	-

REF: S00121C | SCALE: NTS | SHEET 1 OF 1