

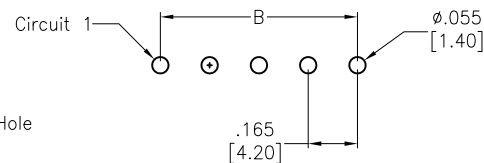
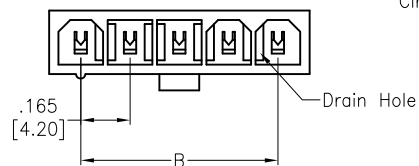


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/09/10	
A		REVISED DIM.	10/24/11	
B		UPDATED DRAWING	9/19/16	HR/MC



RECOMMENDED PCB LAYOUT

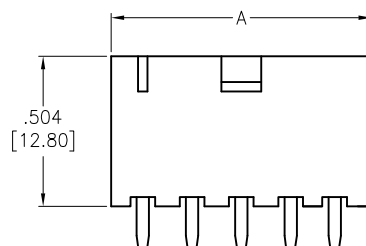

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

contact: Brass, Tin plated

Electrical:

Operating voltage: 600 V(R.M.S)

Current rating (Used #18AWG): 2~3P: 9A, 4~6P: 8A,
 7~10P: 7A, 11~12P: 6A.

Contact resistance: 10 mohms Max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature range:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 12

A= .165 [4.20] x No. of Positions + .047 [1.20]

B= .165 [4.20] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS DRAWN CHECKED APPROVED			DATE 4/09/10 TITLE .165 [4.20] HOUSING, MALE TERMINALS VERTICAL, SINGLE, PCB MOUNT		
SIZE X			PART NO. DMF-XX-A-VS-T		
REF: S00123T			SCALE: NTS		
SHEET 1 OF 1			REV. B		