

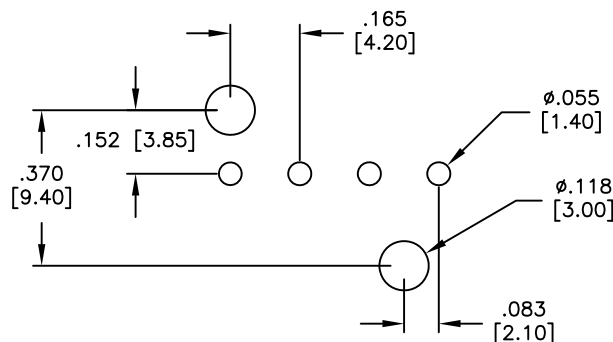
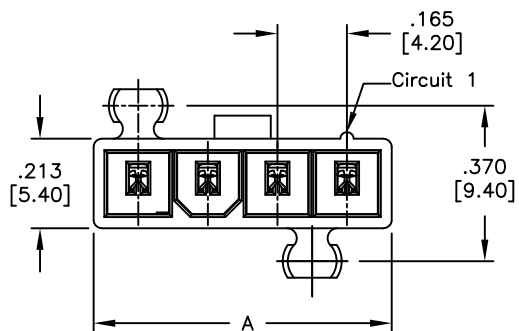


APPROVED: _____
DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/09/10	
A		REVISED DIM.	10/24/11	
B		REVISED SPEC.	02/04/12	
C		UPDATED SPEC.	9/19/16	HR/MC

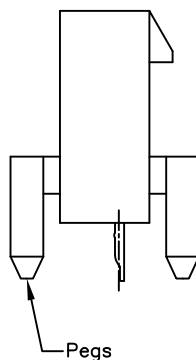

RECOMMENDED PCB LAYOUT

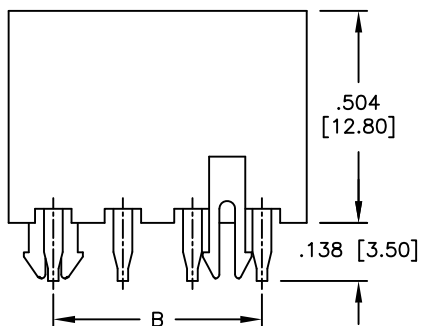

ADAM P/N	A	B
DMF-02-A-VS-T-P	.378 [9.60]	.165 [4.20]
DMF-03-A-VS-T-P	.543 [13.80]	.331 [8.40]
DMF-04-A-VS-T-P	.709 [18.00]	.496 [12.60]
DMF-05-A-VS-T-P	.874 [22.20]	.661 [16.80]
DMF-06-A-VS-T-P	1.039 [26.40]	.827 [21.00]

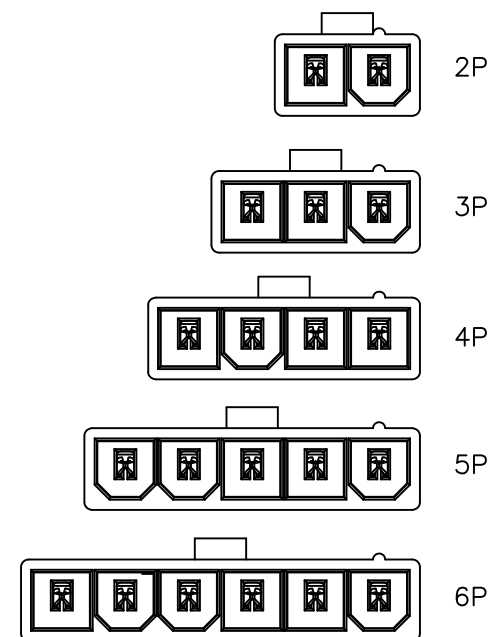

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

contact: Brass, Tin plated

Electrical:

Operating voltage: 600 V(R.M.S)

Current rating (Used #18AWG): 2~3P: 9A, 4~6P: 8A,
7~10P: 7A, 11~12P: 6A.

Contact resistance: 10 mohms Max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature range:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS DATE

DRAWN	DY	4/09/10
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE .165 [4.20] HOUSING, MALE TERMINALS
VERTICAL, SINGLE, PCB MOUNT W/ PEGS

SIZE X	PART NO. DMF-XX-A-VS-T-P	REV. C
REF: S00004T	SCALE: NTS	SHEET 1 OF 1