
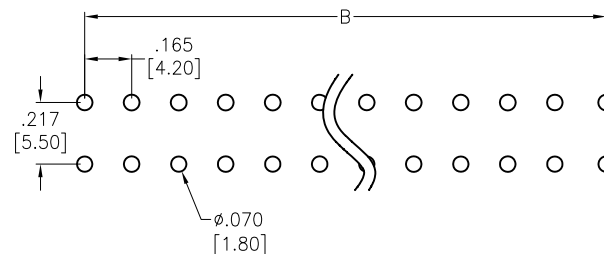




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/2/15	
A		UPDATED DIM.	2/15/16	HR

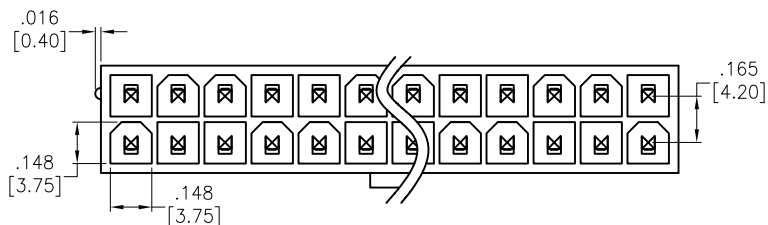

RECOMMENDED PCB LAYOUT

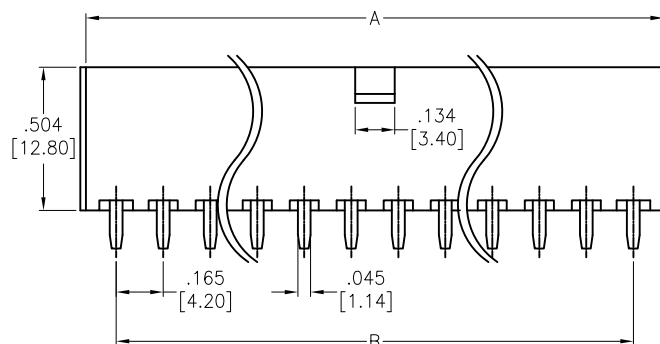

Wire Size AWG	Rated Voltage	CIRCUITS			
		2	4~6	8~10	12~24
#18	250V	9 A	8 A	7 A	6 A
#20		7 A	6 A	5 A	5 A
#22		5 A	4 A	4 A	4 A
#24		4 A	3 A	3 A	3 A

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

Contact: Brass, Sel Gold plated

Electrical:

Voltage rating: 600V AC, DC (R.M.S)

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40° to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22 & 24

A = .165 [4.20] x No. of Spaces + .213 [5.40]

B = .165 [4.20] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE	
DRAWN	AY	7/2/15	
CHECKED	LL	7/2/15	
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STRAIGHT HOUSING, MALE TERMINAL
PCB MOUNT, NO DRAIN HOLES

SIZE	PART NO.	REV.
X	DMF-XX-S-SG-NDH-V0	A

REF: S00123T SCALE: NTS SHEET 1 OF 1