
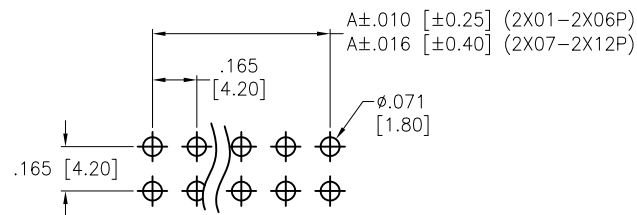


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/21	


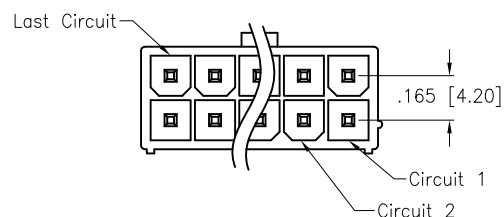


RECOMMENDED PCB LAYOUT

B±.012 [±0.30] (2X01-2X06P)
B±.020 [±0.50] (2X07-2X12P)

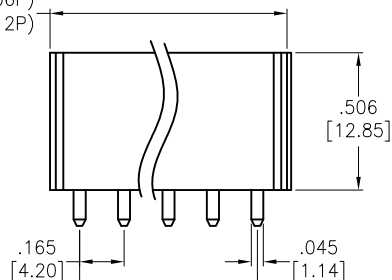

A±.010 [±0.25] (2X01-2X06P)
A±.016 [±0.40] (2X07-2X12P)

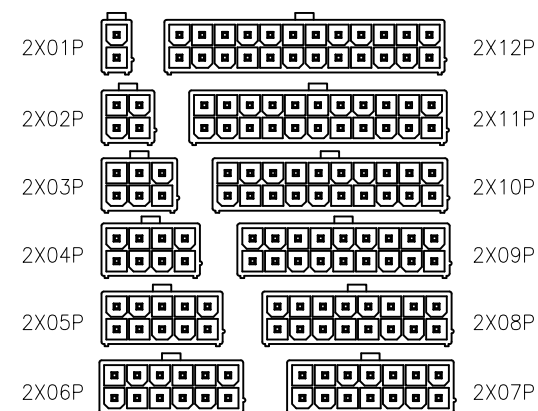

Circuit size layout

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-2

Insulator color: Clear

Contacts: Brass, Tin plated

Electrical:

Voltage rating: 600V AC, DC

Current rating: 7A AC, DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2X01 thru 2X12

A = .165 [4.20] x No. of Spaces

B = .165 [4.20] x No. of Spaces + .220 [5.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS

DATE

DRAWN

OW

1/28/21

CHECKED

BL

1/28/21

APPROVED

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

STRAIGHT HOUSING, MALE TERMINAL
PCB MOUNT

SIZE

X

PART NO.

DMF-XX-S4

REV.

-

REF: S00111C

SCALE: NTS

SHEET 1 OF 1