

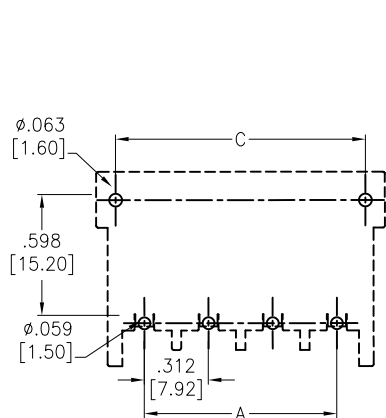
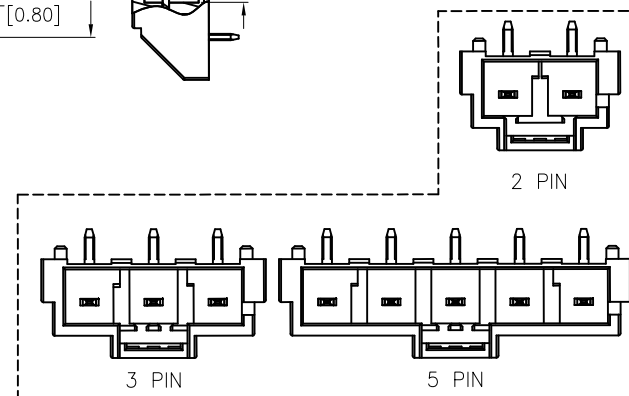
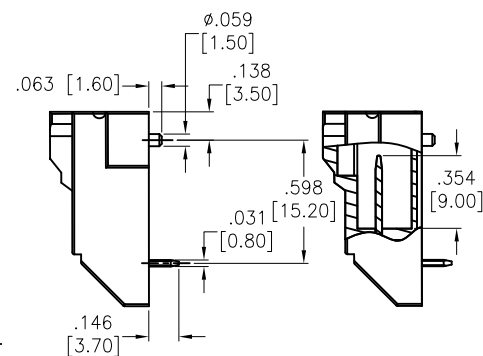
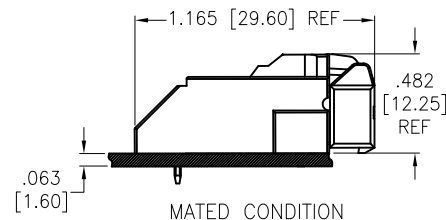



APPROVED: _____
 DATE: _____ TITLE: _____
 CUSTOM PRODUCT ARE NON-CANCELABLE / NON-RETURNABLE

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/26/22	

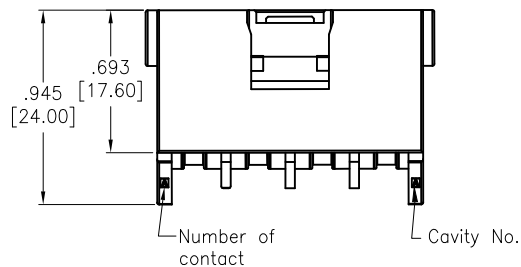

RECOMMENDED PCB LAYOUT

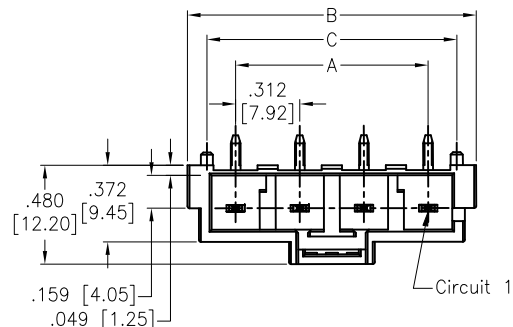

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Natural

Contacts: High conductivity Copper Alloy

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 600V AC,DC

Current rating: 13~30A AC,DC

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 2,500 VAC for 1 minute

Temperature Rating:

-55°C to +85°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 05

A= .312 [7.92] x No. of Space

B= .312 [7.92] x No. of Space + .074 [11.88]

C= .312 [7.92] x No. of Space + .279 [7.08]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HILES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	JJ	12/26/22
CHECKED	YC	12/26/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE	WAVER, 7.92 PITCH RIGHT TYPE		
SIZE	PART NO.	REV.	
X	DMG-AF-XX-H	-	
REF:	S00186T	SCALE:	NTS
SHEET		1 OF 1	