APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/15	
A		UPDATE DRAWING	8/26/19	OW/KC

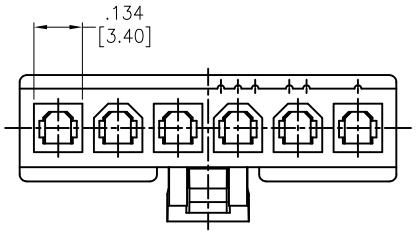

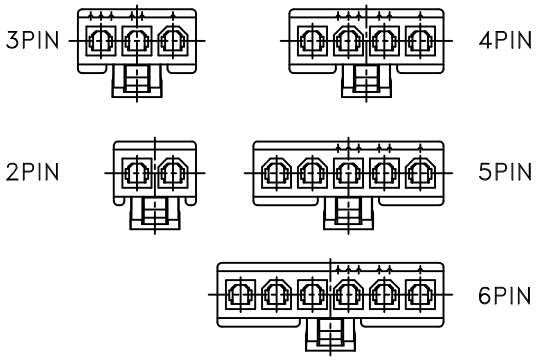

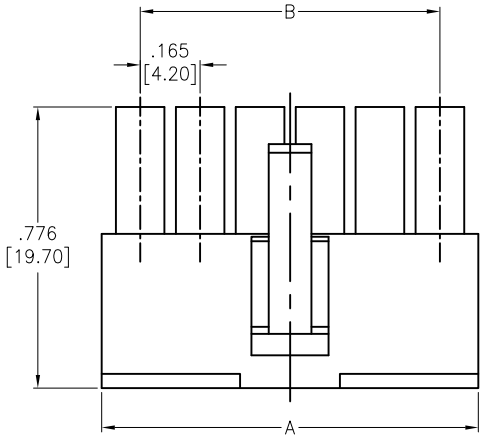

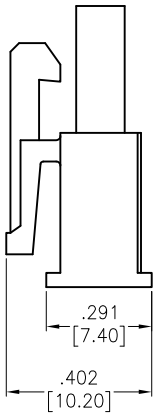

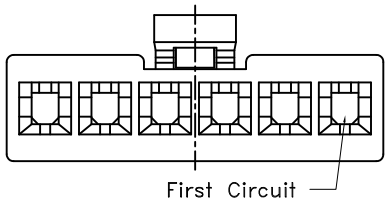

Positions: 02 thru 06
A= .165 [4.20] x No. of Space + .213 [5.40]
B= .165 [4.20] x No. of Space

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: Natural
Electrical:
Current Rating: 7A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	11/17/15
CHECKED	LW	11/17/15
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: FEMALE WIRE HOUSING, SINGLE ROW .165 [4.20] PITCH

SIZE	PART NO.	REV.
X	DMH-XX-S1	A

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1